

LIGHT SOURCE

LED quantity	1
Power max	1 W – 2 W
Total lumen output (3000K CRI>90)	63 lm – 80 lm
Efficacy lm/W (3000K CRI>90)	63 lm/W – 40 lm/W
LOR (3000K)	-
CRI	>80 - >90
LED Temperature (K)	2700 K- 2700K CRI>90- 3000 K- 3000 KK CRI>90 -4000 K-5000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens
Available optics	10°-25°-40°-60°
Beam direction	Adjustable +/-150°, Rotating +/-355°
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing(Black, Grey, Titanium, Champagne Gold)
Available finishes	Black, Grey, Titanium, Champagne Gold
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	Upon Request
Connection in	In series at 350mA – 500mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø18 x 37 x 300
Weight	110 gr
Mounting	Wall, Ceiling
Cut out (mm)	Ø13,5 mm
Use	Indoor

NOTES

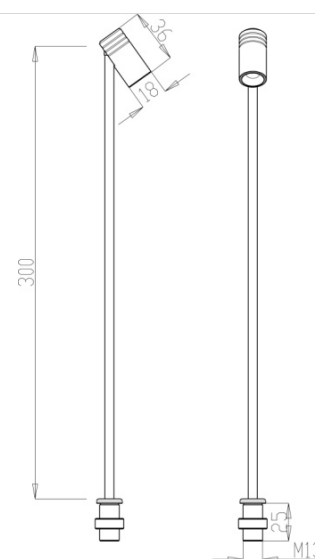

2W 3000K CRI>90

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
10°			
0.60	0.12	2581	1574
1.20	0.23	645	394
1.80	0.35	287	175
2.40	0.46	161	98
3.00	0.58	103	63