

LIGHT SOURCE

LED quantity	1
Power max	6 W – 9 W
Total lumen output (3000K)	493 lm – 632 lm
Efficacy lm/W (3000K)	82 lm/W - 70 lm/W
LOR (3000K)	89% - 86%
CRI	>80 - >90
LED Temperature (K)	2700 K- 3000 K- 3000 K CRI>90- 4000 K- 5000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	3°-10°-30°
Beam direction	Adjustable +/-60°, Rotating +/-360°
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing (Gray, Black, Titanium, Champagne Gold)
Available finishes	Gray, Black, Titanium, Champagne Gold
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-

ELECTRICAL FEATURES




Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	Upon request
Connection in	In series at 500mA – 700mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø40 x 82 (106 mm - 9W)
Weight	130 gr (6W) – 140 gr (9W)
Mounting	Wall, Ceiling, Floor
Cut-out (mm)	See notes
Use	Indoor

NOTES

Fixing elements:

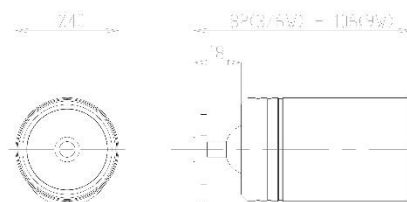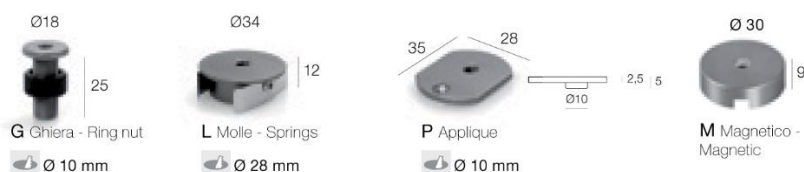

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
10°			
1.00	0.20	10422	6390
2.00	0.40	2606	1598
3.00	0.60	1158	710
4.00	0.80	651	399
5.00	1.00	417	256