


APP-LIQUES

App-eal 1

code APE01

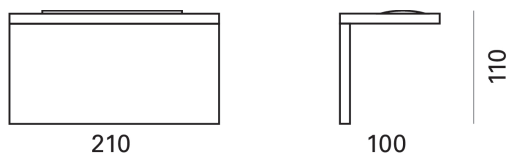


PRODUCT DESCRIPTION

Wall-mounted fixtures for indirect diffused lighting. Complete with 230V/240V professional linear LED sources. App-line, a little shelf with indirect lighting emission. App-eal "L" shaped with direct lighting emission. Body in painted milled aluminium. Optical group complete with frosted screen. Degree of protection IP40.

PRODUCT FEATURES

Mounting method	wall
Lamps	LED 230V
Wattage	1x13W
Color temperature	3000K
Color rendering index	>80
Optics	110°
Finishing	white
Source luminous flux	980lm
Luminous flux	940 lm
Fitting efficiency	72 lm/W
Chromaticity tolerance (initial	3
Estimated average life expectancy	50000h L70 B10 ta
	25°C
Ballast	included
Mains voltage	220-240V / 50-60Hz
Energy efficiency class	A
Weight	1,2 Kg
Dimension	100x210 H 110 MM
Grado IP	IP40
	No

Dimmable with phase cut dimmer dedicated
Vimar EvoEikon or equivalent

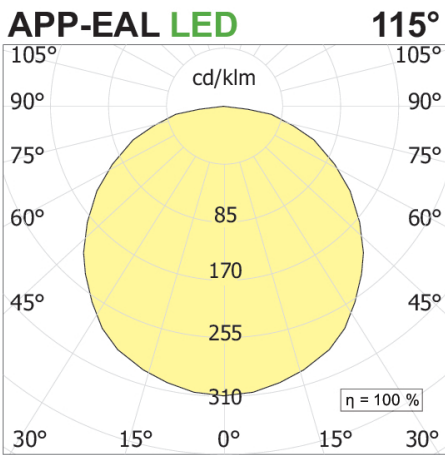

EN605981 compliant