



Art. no. 100151

LED panel Basic Office 600x600 mm, 30.5 W, 4,000 K, white

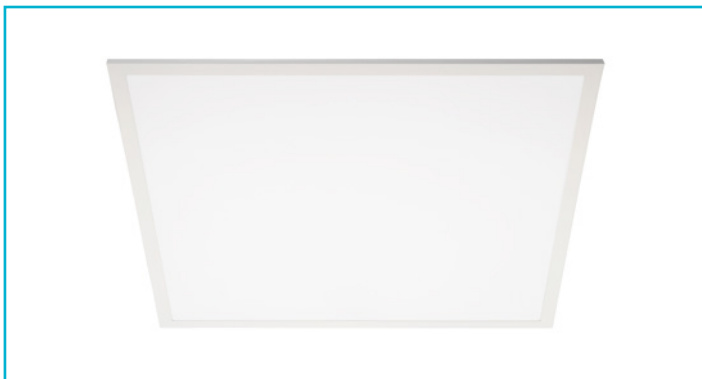

Special features

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure
- Suitable for office spaces, reception rooms and hallways
- Good value, ready-to-install solution
- Incl. CC power supply, 900 mAh, 33-38 V, 36 W

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Surface Structure of Lens	Microprismatic
Protection Class Lamp	Protection class III/safety extra-low voltage
Protection Class Power Plug	Protection class II/protective insulation
Rated Input	30.5 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

IK Protection Class	IK03
Life Time L70 / B50	50000 h
Life Time L80 / B50	50000 h
Switching Cycles	100000
Power Consumption	31 kWh/1000h
EEL	E

Light Source	LED, Light source changeable TC
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	4000 lm
Luminous Efficiency	131.1 lm/W
Rated Angle of Reflection	90 Degree
UGR	19

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	595 mm
Width	595 mm
Height	32 mm
Product weight	1900 g

Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 40