


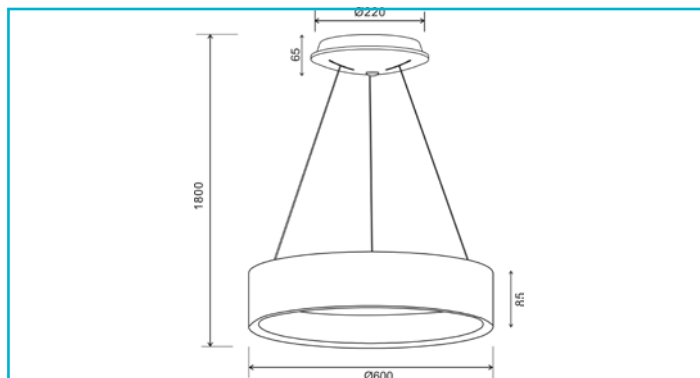

SCULPTORIS series pendant lamps boast an impressive matte visual design and luminous ring. With high luminous intensity and large light emission angle, the series offers flexible applications in many different areas, whether in living areas or for providing imposing lighting solutions to office spaces.

#### Special features

- Light colour adjustable in two stages
- Circumferential diffuser
- Can be suspended by up to 1,800/3,000 mm [depending on model]

|                                      |                                           |
|--------------------------------------|-------------------------------------------|
| <b>Housing Material</b>              | Aluminium                                 |
| <b>Housing Color</b>                 | White                                     |
| <b>Surface structure</b>             | Matt                                      |
| <b>Material of Lens</b>              | Acryl                                     |
| <b>Surface Structure of Lens</b>     | Satined                                   |
| <b>Protection Class</b>              | Protection class I/protective grounding   |
| <b>Rated Input</b>                   | 42 W                                      |
| <b>Rated Input Voltage Frequency</b> | 220-240 V/AC 50 / 60 Hz                   |
| <b>Power Supply Unit incl.</b>       | Yes                                       |
| <b>Dimmable</b>                      | Yes                                       |
| <b>Control</b>                       | Leading-edge dimmer, Trailing-edge dimmer |
| <b>Motion Detector</b>               | No                                        |

|                            |              |
|----------------------------|--------------|
| <b>Working Temperature</b> | -10 to 45 °C |
| <b>Storage Temperature</b> | -10 to 45 °C |
| <b>IP Protection Class</b> | IP 20        |
| <b>IK Protection Class</b> | IK04         |

|                                             |                                                                    |
|---------------------------------------------|--------------------------------------------------------------------|
| <b>Life Time L70 / B50</b>                  | 30000 h                                                            |
| <b>Switching Cycles</b>                     | 20000                                                              |
| <b>Power Consumption</b>                    | 42 kWh/1000h                                                       |
| <b>Energy Efficiency Class Lightsources</b> | This product contains a light source of energy efficiency class E. |

|                                        |                                 |
|----------------------------------------|---------------------------------|
| <b>Light Source</b>                    | LED, Light source changeable TC |
| <b>Color Temperature</b>               | 3000/4000 K                     |
| <b>Colour Consistency</b>              | 6 SDCM                          |
| <b>Colour consistency light source</b> | 6 SDCM                          |
| <b>Colour Rendering Index (Ra)</b>     | 80                              |
| <b>Rated Luminous Flux</b>             | 3000/3100 lm                    |
| <b>Rated Angle of Reflection</b>       | 150 Degree                      |
| <b>Light Distribution</b>              | Symmetric                       |
| <b>Light Exit Surfaces</b>             | 1                               |
| <b>Light characteristics</b>           | Direct, Indirect                |
| <b>Light direction</b>                 | Top, Below                      |
| <b>Height</b>                          | 110 mm                          |
| <b>Diameter</b>                        | 600 mm                          |
| <b>Base height</b>                     | 65 mm                           |
| <b>Base diameter</b>                   | 220 mm                          |
| <b>Pendulum Length max.</b>            | 1800 mm                         |