


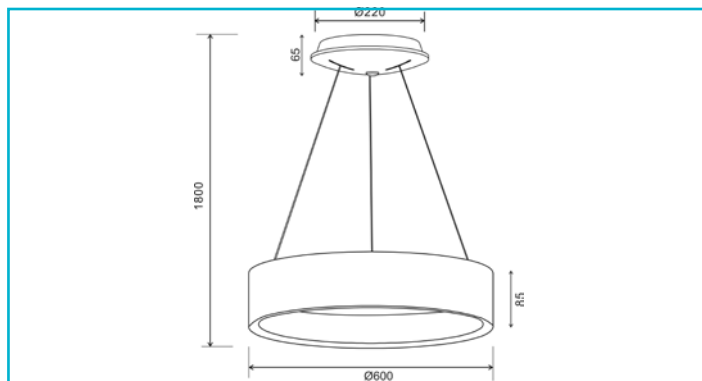

SCULPTORIS series pendant lamps boast an impressive matte visual design and luminous ring. With high luminous intensity and large light emission angle, the series offers flexible applications in many different areas, whether in living areas or for providing imposing lighting solutions to office spaces.

Special features

- Light colour adjustable in two stages
- Circumferential diffuser
- Can be suspended by up to 1,800/3,000 mm [depending on model]

Housing Material	Aluminium
Housing Color	Black
Surface structure	Matt
Material of Lens	Acryl
Surface Structure of Lens	Satined
Protection Class	Protection class I/protective grounding
Rated Input	42 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	42 kWh/1000h
Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class E.

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	3000/3100 lm
Rated Angle of Reflection	150 Degree
Light Distribution	Symmetric
Light Exit Surfaces	1
Light characteristics	Direct, Indirect
Light direction	Top, Below
Height	110 mm
Diameter	600 mm
Base height	65 mm
Base diameter	220 mm
Pendulum Length max.	1800 mm