


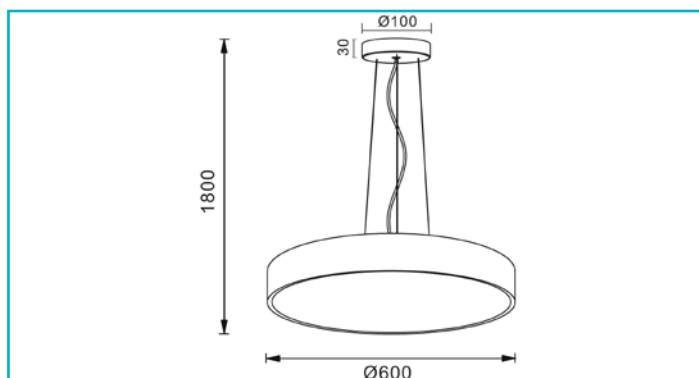

MENKAR series pendant lamps feature clever lighting functions and high-quality aluminium accents. The rear light, which can be switched on separately (approx. 15-20 % of indirect lighting component), allows continuous indirect lighting whilst the main light can be switched on at any time.

#### Special features

- Indirect and direct lighting
- High light intensity
- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]
- Optional diffuser lens for UGR<19

|                                      |                                           |
|--------------------------------------|-------------------------------------------|
| <b>Housing Material</b>              | Aluminium                                 |
| <b>Housing Color</b>                 | Silver                                    |
| <b>Surface structure</b>             | Brushed                                   |
| <b>Material of Lens</b>              | Acryl                                     |
| <b>Protection Class</b>              | Protection class I/protective grounding   |
| <b>Rated Input</b>                   | 65 W                                      |
| <b>Rated Input Voltage Frequency</b> | 220-240 V/AC 50 / 60 Hz                   |
| <b>Power Supply Unit incl.</b>       | Yes                                       |
| <b>Dimmable</b>                      | Yes                                       |
| <b>Control</b>                       | Leading-edge dimmer, Trailing-edge dimmer |
| <b>Motion Detector</b>               | No                                        |

|                                            |                                                                           |
|--------------------------------------------|---------------------------------------------------------------------------|
| <b>IP Protection Class</b>                 | IP 20                                                                     |
| <b>IK Protection Class</b>                 | IK04                                                                      |
| <b>Life Time L70 / B50</b>                 | 30000 h                                                                   |
| <b>Switching Cycles</b>                    | 20000                                                                     |
| <b>Power Consumption</b>                   | 65 kWh/1000h                                                              |
| <b>Energy Efficiency Class Lightsource</b> | This product contains light sources of energy efficiency classes E and F. |

|                                        |                                 |
|----------------------------------------|---------------------------------|
| <b>Light Source</b>                    | LED, Light source changeable TC |
| <b>Color Temperature</b>               | 3000/4000 K                     |
| <b>Colour Consistency</b>              | 6 SDCM                          |
| <b>Colour consistency light source</b> | 6 SDCM                          |
| <b>Colour Rendering Index (Ra)</b>     | 80                              |
| <b>Rated Luminous Flux</b>             | 5600/6000 lm                    |
| <b>Light Distribution</b>              | Symmetric                       |

|                              |                  |
|------------------------------|------------------|
| <b>Light Exit Surfaces</b>   | 2                |
| <b>Light characteristics</b> | Direct, Indirect |
| <b>Light direction</b>       | Top, Below       |

|                             |         |
|-----------------------------|---------|
| <b>Height</b>               | 90 mm   |
| <b>Diameter</b>             | 600 mm  |
| <b>Base height</b>          | 30 mm   |
| <b>Base diameter</b>        | 120 mm  |
| <b>Pendulum Length max.</b> | 1800 mm |

|                            |              |
|----------------------------|--------------|
| <b>Working Temperature</b> | -10 to 45 °C |
| <b>Storage Temperature</b> | -10 to 45 °C |

