


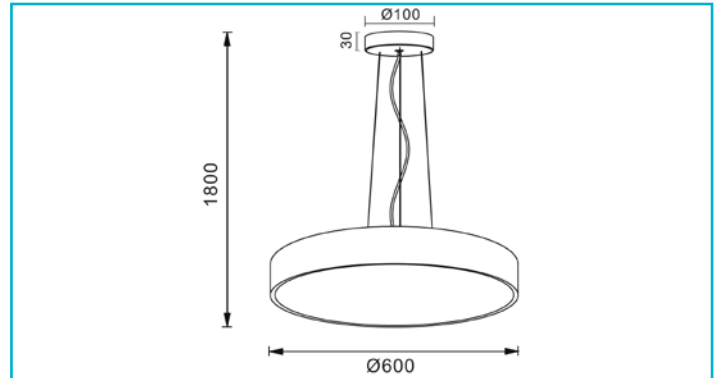

MENKAR series pendant lamps feature clever lighting functions and high-quality aluminium accents. The rear light, which can be switched on separately (approx. 15-20 % of indirect lighting component), allows continuous indirect lighting whilst the main light can be switched on at any time.

Special features

- Indirect and direct lighting
- High light intensity
- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]
- Optional diffuser lens for UGR<19

Housing Material	Aluminium	IP Protection Class	IP 20
Housing Color	Coffee	IK Protection Class	IK04
Surface structure	Brushed		
Material of Lens	Acryl		
Protection Class	Protection class I/protective grounding	Life Time L70 / B50	30000 h
Rated Input	65 W	Switching Cycles	20000
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Power Consumption	65 kWh/1000h
Power Supply Unit incl.	Yes	Energy Efficiency Class Lightsource	This product contains light sources of energy efficiency classes E and F.
Dimmable	Yes		
Control	Leading-edge dimmer, Trailing-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	5600/6000 lm		
Light Distribution	Symmetric		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Height	90 mm		
Diameter	600 mm		
Base height	30 mm		
Base diameter	120 mm		
Pendulum Length max.	1800 mm		
Working Temperature	-10 to 45 °C		
Storage Temperature	-10 to 45 °C		

