


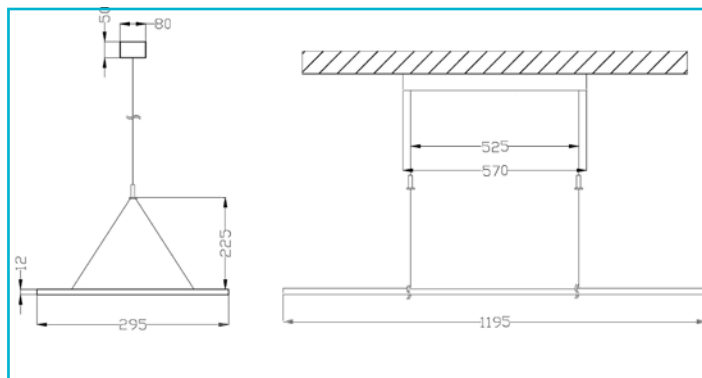

The LED pendant lamp has transparent glass for direct and indirect light distribution that is almost see-through when switched off. When the light is switched on, the pane distributes the light almost entirely without glare.

This pendant lamp is fully office-compatible with a glare value [UGR] of under 19. Bright, efficient and with a sophisticated design, this light not only stands out in any type of office environment.

Special features

- Very low glare value
- Light colour adjustable in 2 stages
- Transparent luminous element
- Max. suspended mounting 1,800 mm

Housing Material	Aluminium
Housing Color	Light grey
Material of Lens	PMMA
Halogen free	Yes
Protection Class	Protection class I/protective grounding
Rated Input	53 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Base width	80 mm
Base height	50 mm
Pendulum Length max.	1800 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 40 °C
IP Protection Class	IP 40
Life Time L70 / B50	50000 h
Life Time L80 / B50	50000 h
Switching Cycles	25000
Power Consumption	53 kWh/1000h
EEL	E

Light Source	LED, Light source not changeable
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	5600/6100 lm
Rated Angle of Reflection	360 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct
Light direction	Top, Below

Length	295 mm
Width	1195 mm
Height	12 mm
Base length	570 mm