


Art. no. 342231

Standing lamp Office Three Pro, Motion, 80 W, DIM,  
2,700-6,500 K, white

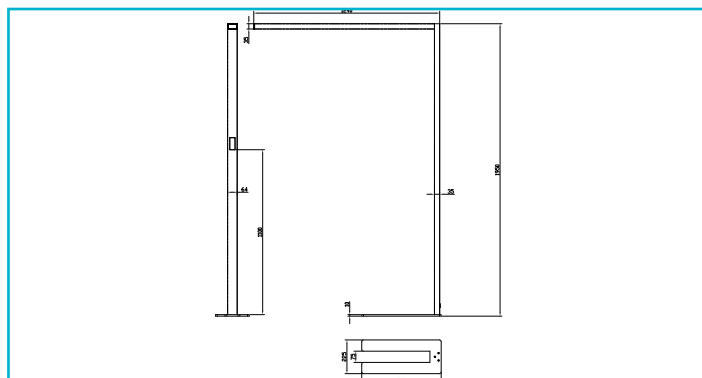

#### Special features

- Ideal for high-quality illumination of individual workstations
- Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables
- Direct and indirect light can be dimmed and switched separately using touch panel
- High-precision radar presence detector detects the smallest movements
- Adjustable switch-off delay of the sensor [5/15/30 mins]
- Daylight sensor for dynamic brightness adjustment

Housing Material	Aluminium
Housing Color	White
Material of Lens	Polycarbonate - PC

Protection Class	Protection class I/ protective grounding
------------------	---

Rated Input	80 W
Rated Power Consumption Standby	0.5 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz

Power Supply Unit incl.	Yes
Primary Connection	Safety plug
Primary Cable Length	2.5 m
Connection Type According to Standard	Typ X
Dimmable	Yes
Control	Touch-Sensor
Motion Detector	Yes
Kind of Motion Detector	Presence detector
Detection Distance	3-3.5 m
Angle of Detection	85 Degree
Motion detector changeable	Yes
Adjustable brightness threshold	No
Adjustable follow-up time	No

Light Source	LED, Light source changeable TC
Lightcolor	Warm white/neutral white/cold white

Colour Temperature	2700-6500 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
Colour Rendering Index (Ra)	95
Rated Luminous Flux	9000/9800 lm
Luminous Efficiency	122.5 lm/W
Rated Angle of Reflection	120 Degree

Rated Angle of Reflection 2	50 Degree
UGR	6

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	1240 mm
Width	64 mm
Height	1950 mm
Base length	530 mm
Base width	225 mm
Base height	10 mm
Product weight	11740 g

Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 20
IK Protection Class	IK06

Life Time L80 / B10	50000 h
Life Time L80 / B50	50000 h
Switching Cycles	100000
Power Consumption	80 kWh/1000h
Energy Efficiency Class Lightsource	This product contains light sources of energy efficiency classes D and F.