


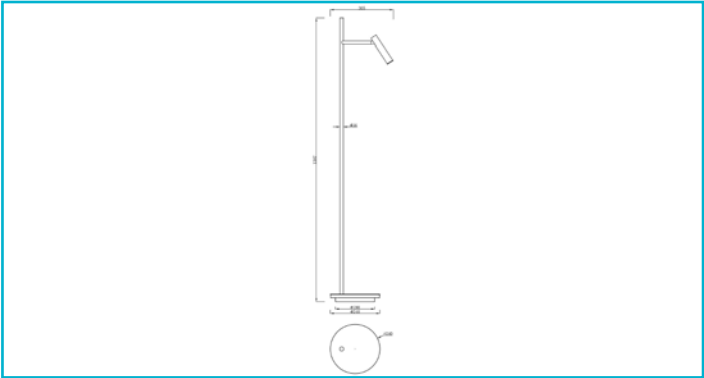

Whether as a bedside lamp or a standing lamp behind your reading armchair, conventional reading lights often lack an indirect lighting option for when you put your book or newspaper down. This is where the BRAHE comes into its own, with its illuminated base that can be switched separately, creating atmospheric indirect islands of light that impressively provide just the right level of illumination even after you have finished reading.

- Special features**
- Can be rotated and swivelled
 - Direct and indirect lighting can be switched on separately

Housing Material	Aluminium	Diameter	305 mm
Housing Color	Black	Product weight	4700 g
Protection Class	Protection class II/protective insulation	Working Temperature	0 to 60 °C
Power Selectable	3 W, 8 W	Storage Temperature	0 to 60 °C
Rated Power Consumption	0.5 W	IP Protection Class	IP 20
Standby			
Rated Input Voltage	220-240 V/AC 50 / 60 Hz	Life Time L70 / B50	30000 h
Frequency		Switching Cycles	10000
Power Supply Unit incl.	Yes	Power Consumption	12 kWh/1000h
Connection Cable Primary	Yes	EEL	G
Primary Connection	Power plug IP20		
Connection Type According to Standard	Typ Y		
Dimmable	No		
Control	Push-Button		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	530 lm		
Luminous Efficiency	46.09 lm/W		
Rated Angle of Reflection	25 Degree		
Light Distribution	Symmetric		
Distribution Characteristic	DLS		
120°			
Swivel Angle	90 Degree		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Below, Side		
Height	1387 mm		