




The ALWAID 2 recessed wall light fits into any 68 mm standard or deep switch box thanks to its compact design. Furthermore, it does not require an additional power supply. The variety of covers allows you to find a style that suits your space and illuminates your surroundings with beautiful indirect light. The article includes the base only; covers are not included in the scope of delivery.

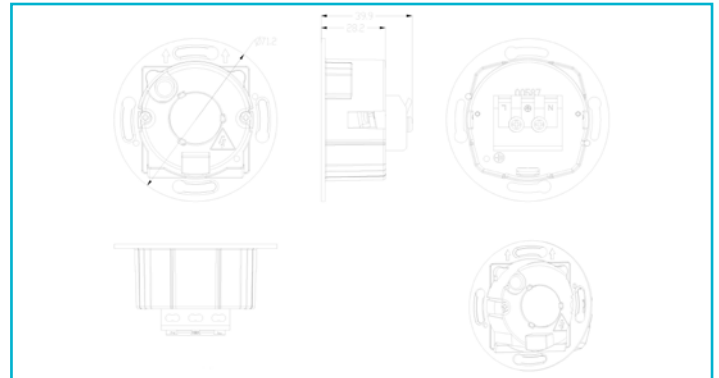

Special features

- 230 V direct connection
- Feed-through wiring possible
- Can be dimmed using leading-edge phase dimmers or trailing-edge phase dimmers
- Suitable for 68 mm standard and deep switch boxes

Housing Material	Aluminium
Housing Color	White
Protection Class	Protection class I/protective grounding
Rated Input	4.8 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Trailing-edge dimmer
Motion Detector	No

Switching Cycles	50000
Power Consumption	5 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class G.

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour Rendering Index (Ra)	90
Rated Luminous Flux	230 lm
Luminous Efficiency	47.9 lm/W
Rated Angle of Reflection	100 Degree
UGR	19

Height	39.9 mm
Diameter	71.2 mm
Installation Depth	39.9 mm
Cut Out Diameter	61.5 mm
Product weight	71 g

Working Temperature	-10 to 55 °C
Storage Temperature	-60 to 20 °C
IP Protection Class	IP 20

Life Time L70 / B50	75000 h
Life Time L80 / B10	50000 h
Life Time L80 / B50	60000 h

