


Art. no. 686869

Recessed Spotlight Basic round, Tilt, 1x max. 50 W  
MR16, silver

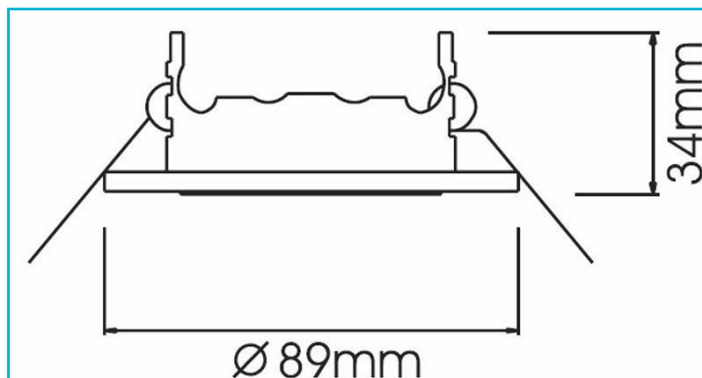

|                                   |                                               |
|-----------------------------------|-----------------------------------------------|
| <b>Housing Material</b>           | Metal                                         |
| <b>Housing Color</b>              | Chrome                                        |
| <b>Surface structure</b>          | Shiny                                         |
| <b>Protection Class</b>           | Protection class III/safety extra-low voltage |
| <b>Operating Mode</b>             | Constant voltage                              |
| <b>max. Power</b>                 | 1x max. 50 W                                  |
| <b>Rated Input Voltage</b>        | 12 V/AC/DC                                    |
| <b>Socket Description</b>         | GU5.3 / MR16                                  |
| <b>Socket Quantity</b>            | 1 PCS                                         |
| <b>Power Supply Unit incl.</b>    | No                                            |
| <b>Connection Cable Secondary</b> | Yes                                           |
| <b>Secondary Connection</b>       | Open cables                                   |
| <b>Dimmable</b>                   | Yes                                           |
| <b>Control</b>                    | Dimmable via optional light source            |
| <b>Motion Detector</b>            | No                                            |
| <b>Execution</b>                  | Without lamp                                  |
| <b>Swivel Angle</b>               | 30 Degree                                     |
| <b>Light Exit Surfaces</b>        | 1                                             |
| <b>Light characteristics</b>      | Direct                                        |
| <b>Light direction</b>            | Below                                         |
| <b>Diameter</b>                   | 89 mm                                         |
| <b>Installation Depth</b>         | 65 mm                                         |
| <b>Cut Out Diameter</b>           | 68 mm                                         |
| <b>Product weight</b>             | 76 g                                          |
| <b>Working Temperature</b>        | -5 to 40 °C                                   |
| <b>IP Protection Class</b>        | IP 20                                         |