


Art. no. 707186

Single-phase spotlight Nihal Mini, 10.9 W, DIM, 2,700 K, black

 **DEKOLIGHT**

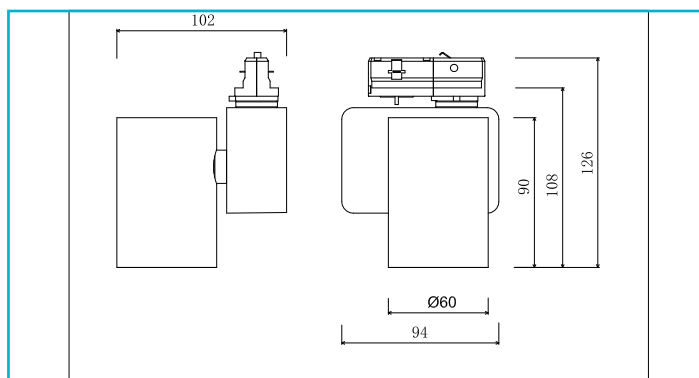

Special features

- can be rotated and swivelled

Housing Material	Aluminium, Polycarbonate	Working Temperature	-10 to 55 °C
Housing Color	Black	Storage Temperature	-20 to 60 °C
Protection Class	Protection class I/protective grounding	IP Protection Class	IP 20
Rated Input	10.9 W	Life Time L70 / B50	75000 h
Rated Input Voltage	220-240 V/AC	Life Time L80 / B10	50000 h
Power Supply Unit incl.	Yes	Switching Cycles	50000
Dimmable	Yes	Power Consumption	11 kWh/1000h
Control	Leading-edge dimmer, Trailing-edge dimmer	Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class F.
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	2700 K		
Colour Consistency	3 SDCM		
Colour consistency light source	3 SDCM		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	720 lm		
Luminous Efficiency	66 lm/W		
Rated Angle of Reflection	36 Degree		
Swivel Angle	350 Degree		
Rotation Angle	350 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Length	94 mm		
Width	102 mm		
Height	126 mm		
Diameter	60 mm		
Product weight	543 g		