


Art. no. 730289

Recessed floor light Asymmetrical, 12 W, 3,000 K,
silver

 **DEKOLIGHT**

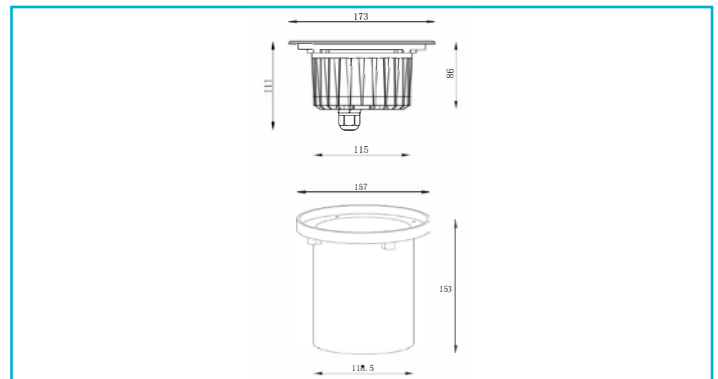

Special features

- Asymmetrical
- Including 0.5 m connecting cable

Housing Material	Stainless steel, Aluminium
Housing Color	Silver
Material of Lens	Glass
Functions	Driveable - 20 kN
Protection Class	Protection class I/protective grounding
Rated Input	11.9 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Connection box
Primary Cable Length	0.5 m
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	700 lm
Luminous Efficiency	58.8 lm/W
Rated Angle of Reflection	45 Degree
Rated Angle of Reflection 2	35 Degree
Light Distribution	Asymetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Top

Height	111 mm
Diameter	173 mm
Installation Depth	153 mm
Cut Out Diameter	157 mm

Product weight	1912 g
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 67
IK Protection Class	IK09
Load Force max.	20 kN
Life Time L70 / B50	25000 h
Switching Cycles	100000
Power Consumption	12 kWh/1000h
EEI	G