


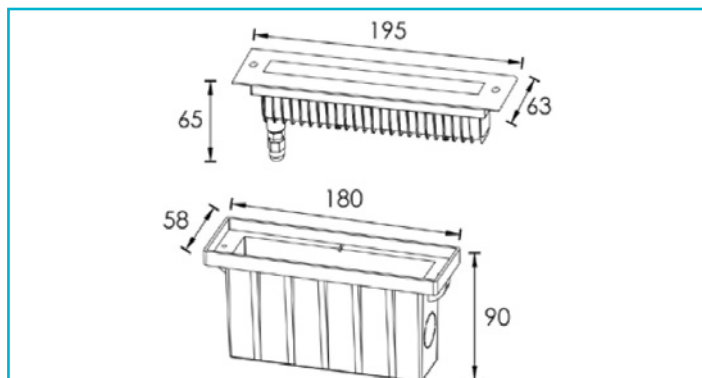

Housing Material	Stainless steel, Aluminium
Housing Color	Silver
Material of Lens	Glass
Functions	Driveable - 20 kN
Protection Class	Protection class I/protective grounding
Rated Input	5.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Connection box
Primary Cable Length	0.5 m
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	340 lm
Luminous Efficiency	61.8 lm/W
Rated Angle of Reflection	45 Degree
Rated Angle of Reflection 2	35 Degree
Light Distribution	Asymetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Top

Length	195 mm
Width	63 mm
Height	65 mm

Installation Depth	90 mm
Cut Out Length	180 mm
Cut Out Width	58 mm
Product weight	940 g
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 67
Load Force max.	20 kN
Life Time L70 / B50	25000 h
Switching Cycles	100000
Power Consumption	6 kWh/1000h
EEI	G