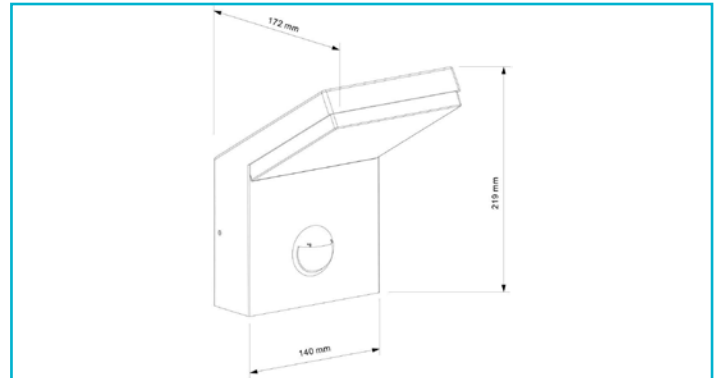


**Special features**

- Modern minimalist design
- Powerful and energy saving
- Uniform illumination
- Adjustable brightness threshold and operating time [model-dependent]

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Plastic
Protection Class	Protection class I/protective grounding
Rated Input	18 W
Rated Power Consumption	0.5 W
Network Standby	
Rated Input Voltage	110-240 V/AC 50 / 60 Hz
Frequency	
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	Yes
Kind of Motion Detector	Infrared
Detection Distance	8-12 m
Angle of Detection	120 Degree
Motion detector changeable	Yes
Adjustable brightness threshold	No
Adjustable follow-up time	Yes
Follow-up time	8-480 s

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	1650 lm
Rated Angle of Reflection	110 Degree
Distribution Characteristic	DLS
120°	

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	140 mm
Width	172 mm
Height	219 mm
Base length	125 mm
Base width	135 mm
Base height	15 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54
Life Time L70 / B50	30000 h
Switching Cycles	15000
Power Consumption	18 kWh/1000h
EEI	F

