
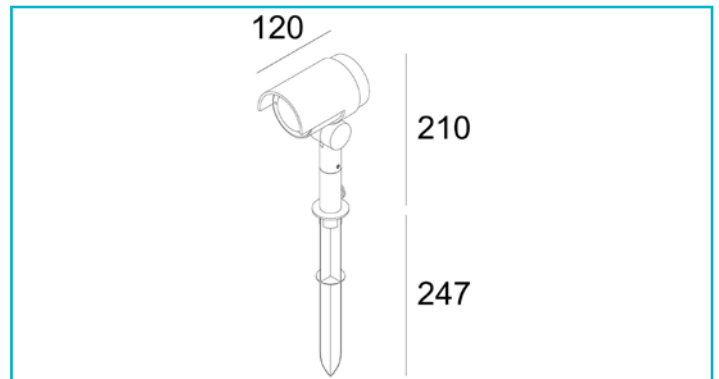


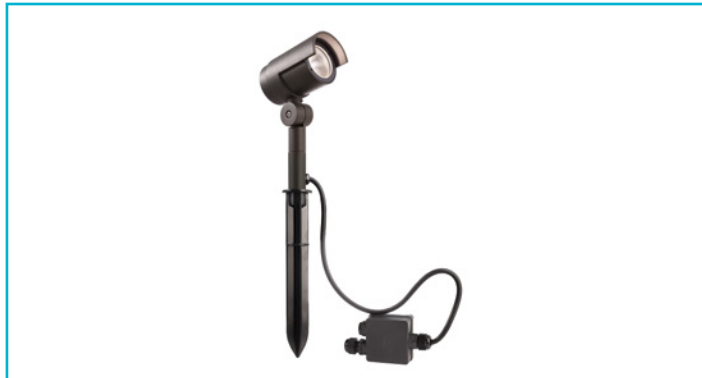

Housing Material	Aluminium	Length	120 mm
Housing Color	Grey	Height	457 mm
Material of Lens	Glass	Diameter	75 mm
		Product weight	1011 g
Protection Class	Protection class I/protective grounding	Working Temperature	-20 to 40 °C
Rated Input	21.5 W	Storage Temperature	-10 to 60 °C
Rated Input Voltage	220-240 V/AC 50 / 60 Hz	IP Protection Class	IP 65
Frequency			
Power Supply Unit incl.	Yes	Life Time L70 / B50	30000 h
Connection Cable Primary	Yes	Switching Cycles	25000
Primary Connection	Connection box IP65	Power Consumption	22 kWh/1000h
Primary Cable Length	0.5 m	EEI	G
Connection Type According to Standard	Typ X		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	1350 lm		
Luminous Efficiency	62.8 lm/W		
Rated Angle of Reflection	45 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	180 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Top		