


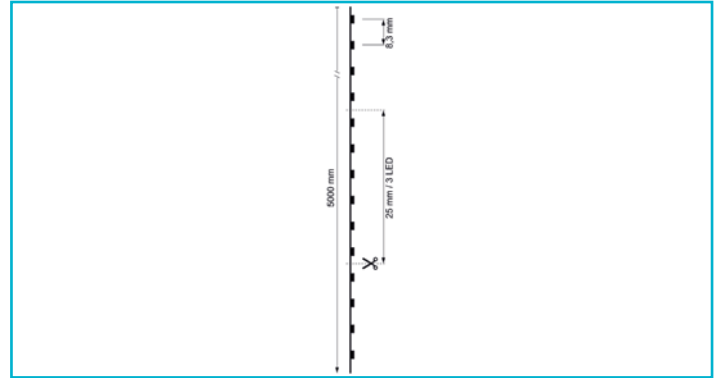

Housing Material	Copper	Total Length to be Operated max.	5 m
Housing Color	White	Length	5000 mm
		Width	8 mm
Protection Class	Protection class III/safety extra-low voltage	Height	3 mm
Operating Mode	Constant voltage	Product weight	50 g
Rated Input 1m	7 W	Working Temperature	-15 to 50 °C
Rated Power Consumption Standby	0.5 W	Storage Temperature	-10 to 60 °C
Rated Input Voltage	12 V/DC	IP Protection Class	IP 20
Power Supply Unit incl.	No		
Connection Cable Primary	Yes	Life Time L70 / B50	60000 h
Primary Connection	With free strand / conductor ends	Switching Cycles	30000
Primary Cable Length	1 m	Power Consumption	7 kWh/1000h
Connection Cable Secondary	Yes	EEL	F
Secondary Connection	Open cables		
Secondary Cable Length	1 m		
Dimmable	Yes		
Control	Dimmable via optional controller		
Number of Channels	1		
Light Source	LED, Light source not changeable		
Lightcolor	Neutral white		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	90		
Rated Angle of Reflection	120 Degree		
Luminous Flux 1m	670 lm		
Luminous Efficiency 1m	95.71 lm/W		
LED/Meter	120		
Segment Length	25 mm		
Segment LED Quantity	3		
LED Distance	8.33 mm		
Bending Radius min.	20 mm		