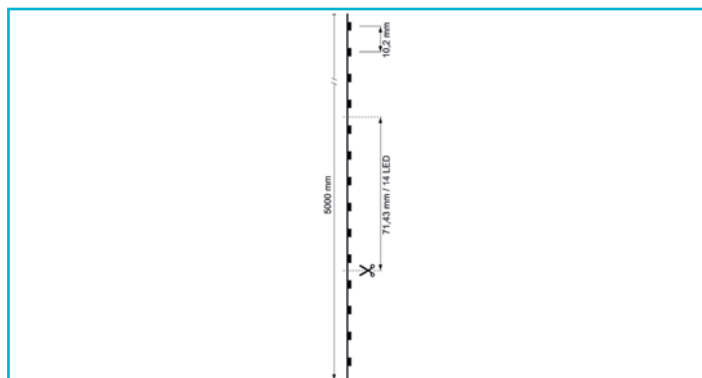
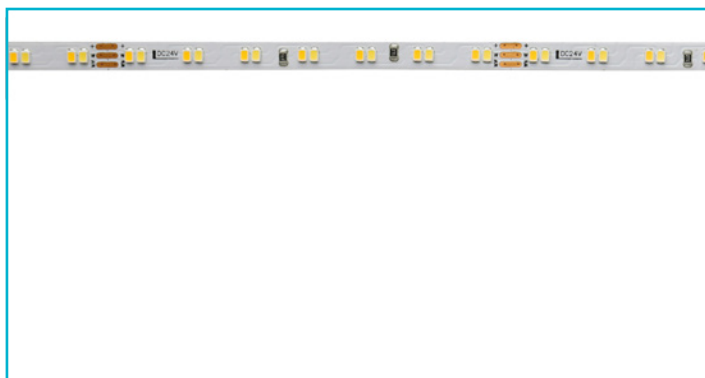


**Special features**

- high-performance adhesive tape 3M 200MP

Housing Material	Copper	LED Distance	10.2 mm
Housing Color	White	Bending Radius min.	50 mm
Halogen free	No	Total Length to be Operated max.	5 m
Protection Class	Protection class III/safety extra-low voltage	Length	5000 mm
Operating Mode	Constant voltage	Width	5 mm
Rated Input 1m	11 W	Height	1.2 mm
Rated Power Consumption Standby	0.5 W	Product weight	59 g
Rated Input Voltage	24 V/DC	Working Temperature	-10 to 60 °C
Power Supply Unit incl.	No	Storage Temperature	-15 to 50 °C
Connection Cable Primary	Yes	IP Protection Class	IP 20
Primary Connection	With free strand / conductor ends	Life Time L70 / B50	30000 h
Primary Cable Length	1 m	Switching Cycles	1000000
Connection Cable Secondary	Yes	Power Consumption	11 kWh/1000h
Secondary Connection	Open cables	EEI	E
Secondary Cable Length	1 m		
Dimmable	Yes		
Control	Dimmable via optional controller		
Number of Channels	2		
Light Source	LED, Light source not changeable		
Lightcolor	Warm white/cold white		
Colour Temperature	3000-6500 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	90		
Rated Angle of Reflection	120 Degree		
Distribution Characteristic 120°	DLS		
Luminous Flux 1m	1025 lm		
Luminous Efficiency 1m	93.18 lm/W		
LED/Meter	196		
Segment Length	71.4 mm		
Segment LED Quantity	14		