


1207 - Box

Code: 431501-00



1207 Box

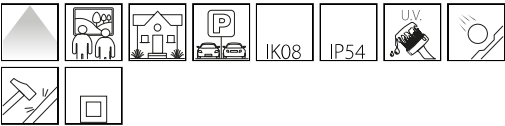

GENERAL INFORMATION

Article	1207 - Box
Code	431501-00

DIMENSIONS AND WEIGHT

Length (mm)	223 mm
Width (mm)	114 mm
Height (mm)	89 mm
Weight (Kg)	0.5 kg

INSTALLATION

Recessed dimensions - Length (mm)	215 mm
Recessed dimensions - Width (mm)	110 mm

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Voltage (V)	0 V
Frequency (Hz)	0 Hz
Wiring name	CLD-S
Wiring	power supply 220-240V 50/60Hz. Rigid cable with 0.50 mm2 cross-section. 2P terminal block with max. 2.5 mm2 cross-section cables.
Power factor	>0
Insulation class	Class I
Controllability	None

1207 - Box

Code: 431501-00



PHOTOMETRIC DATA

Lighting source	LED
CCT	0 K
LED flux maintenance	0 hr, L 0, B 0


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	54


1207 - Box

Code: 431501-00

MATERIALS AND COLOURS



223



114

89

DOWNLOAD

MOUNTS

AssemblyInstructions box 07-20.pdf

DESIGNS

TechnicalDrawing 1207box.dxf



Housing	in fibreglass nylon, shatterproof, UV stabilised. Complete with linear vertical grid, frame in die-cast aluminium.
Diffuser	in opal plexiglass.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Graphite
Equipment	silicone and EPDM rubber sealing gasket.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	F

WARRANTY

After sales warranty	3 yr
----------------------	------