



SPALYS34

Design by Ryosuke Fukusada

Collection consisting of aluminium suspended lamps.
Available in several colours and sizes.

Typology: SUSPENSION LAMP

Ratings


- Built in line voltage **LED** module
- CCT 3000 K, 2700K
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off dimmable trailing edge
- Die cast aluminium body, painted
- Opalescent diffuser

kg 2.5 m3 0.04

Product code composition

ALYSOID


Type	Article	Colours	Catene / chains	Source
SP	ALYS 34	AN anthracite grey wrinkled	NI black polished nickel	LED 20W - diffused beam 3000K*, 2700K
			OT natural brass	

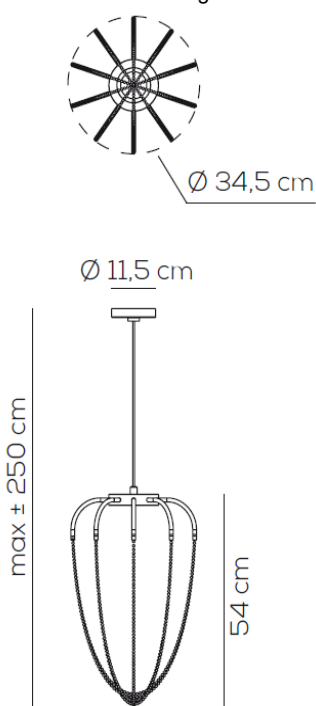


IP20 CRI90 220-240VAC **LED** ~1800 lm* 90 lm/W*

example composition code SP ALYS34 AN OT LED

Available colors



OT
Anthracite
grey and
natural brass



NI
Anthracite
grey and
black
polished
nickel

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER _____ NOTES _____

SPALYS34AN _ _ LED

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.