
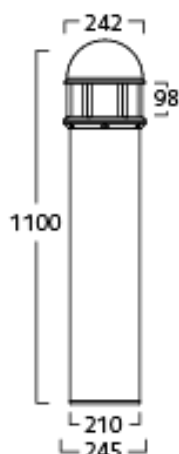


Art.no. 301070



Verda bollard

DESIGN

Colour Anthracite grey

LIGHT DATA & PERFORMANCE

Lumen output 1206	lm/W 60
Light source colour 830	CCT, K 3000
CRI 80	SDCM 3
Lumen maintenance L80 B10, h 50	LED driver, h/max failure % 100000/10
000	

ELECTRICITY & ENCLOSURE

Protective class 1	IP rating 65
IK rating 10	System Wattage 20

DIMENSIONS

Height, mm 1100

A robust bollard available in three different heights makes it possible to combine high and low light points. Verda offers a simple and flexible installation even with heavy cables and smooth onward connection.

Installation Luminaire for assembly on foundations. Can also be cast in-situ or mounted on ground plate. Supplied with ground plate.

Connection Terminal block 5x16 mm².

Design Body of cast aluminium with screw joints of stainless steel. Diffuser of polycarbonate (PC). The ballast and fuse insert are built into the body.

Reflector Enamelled aluminium.

Standard colour Anthracite grey (Gris 900 Sablé).