


Art.no. 64945-402

EAN 7320047778353

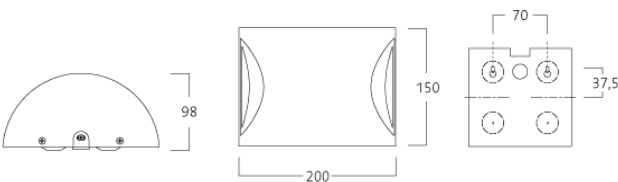

A robust and decorative wall luminaire for environments with many people in motion with a pleasant, glare-free light.

Installation Two securing holes.

Connection Connects with 230 V, built-in LED driver. Snap-in terminal block 3 or 5 x 2.5 mm², through wiring possible. Cable entry at the rear of the luminaire or surface mounted mains cable possible from above.

Design Luminaire body in white sheet metal. Mounting plate for the LED module with aluminium. Dust cover in frosted acrylic.

Dimming DALI/phase-pulse control as standard.

Designed by Joakim Fihn.

Beetle

Indirect

DESIGN

Light distribution Indirect Colour White

LIGHT DATA & PERFORMANCE

Lumen output 603	lm/W 55
CCT, K 3000	CRI 80
SDCM 3	Lumen maintenance 50 000 h L94
Lumen maintenance 75 000 h L91	Lumen maintenance 100 000 h L89
Lumen maintenance L80 B50, h 100000	Lumen maintenance L90 B50, h 90000
LED driver, h/max failure % 100000/10	Energy class, LED module D

CONTROLS & CONNECTIVITY

Driver brand Helvar	DALI Device type driver 6
Power on last level Yes	Switch control, max no. 30
AM Yes	

ELECTRICITY & ENCLOSURE

Rated supply voltage, V 220-240	Mains frequency, Hz 0, 50, 60
Protective class 1	IP rating 20
System Wattage 11	Stand by W 0.5
Min. ambient temperature, °C -25	Max. ambient temperature, °C 25
MCB B10A, pcs 27	MCB B16A 45
MCB C10A 46	MCB C16A 75
THD, % 7	Surge protection CM, kV/kA 2
Surge protection DM, kV/kA 1	Power factor, 100 % 0.95

DIMENSIONS

Width, mm 200	Height, mm 150
Weight, kg 1.3	