


Art.no. 64946-402
EAN 7320047778360

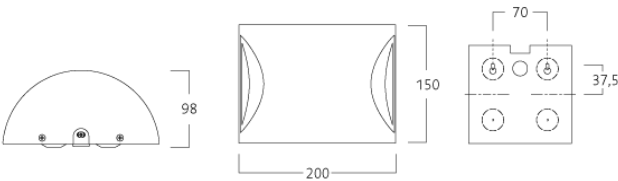

A robust and decorative wall luminaire for environments with many people in motion with a pleasant, glare-free light.

- Installation** Two securing holes.
- Connection** Connects with 230 V, built-in LED driver. Snap-in terminal block 3 or 5 x 2.5 mm², through wiring possible. Cable entry at the rear of the luminaire or surface mounted mains cable possible from above.
- Design** Luminaire body in white sheet metal. Mounting plate for the LED module with aluminium. Dust cover in frosted acrylic.
- Dimming** DALI/phase-pulse control as standard.
- Designed by** Joakim Fihn.

Beetle
Indirect

DESIGN	
Light distribution	Indirect
Colour	White
LIGHT DATA & PERFORMANCE	
Lumen output	629
Im/W	59
CCT, K	4000
CRI	80
SDCM	3
Lumen maintenance 50 000 h	L94
Lumen maintenance 75 000 h	L91
Lumen maintenance 100 000 h	L89
Lumen maintenance L80 B50, h	100000
Lumen maintenance L90 B50, h	90000
LED driver, h/max failure %	100000/10
Energy class, LED module	D
CONTROLS & CONNECTIVITY	
Driver brand	Helvar
DALI Device type driver	6
Power on last level	Yes
Switch control, max no.	30
AM	Yes
ELECTRICITY & ENCLOSURE	
Rated supply voltage, V	220-240
Mains frequency, Hz	0, 50, 60
Protective class	1
IP rating	20
System Wattage	11
Stand by W	0.5
Min. ambient temperature, °C	-25
Max. ambient temperature, °C	25
MCB B10A, pcs	27
MCB B16A	45
MCB C10A	46
MCB C16A	75
THD, %	7
Surge protection CM, kV/kA	2
Surge protection DM, kV/kA	1
Power factor, 100 %	0.95
DIMENSIONS	
Width, mm	200
Height, mm	150
Weight, kg	1.3