

T-LUX BOWLER – Ø 200

datasheet

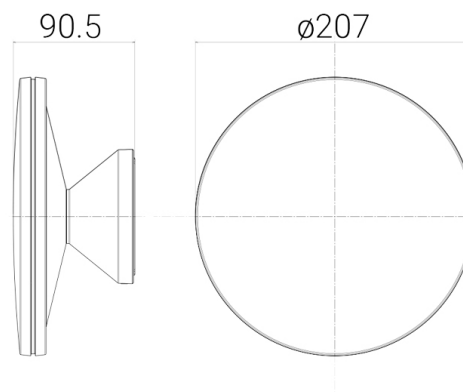
CODE NO. **5559**



AN AN = Anthracite
AG AG = Aluminum Grey

3K – 3000K / **4K** – 4000K

Ø 207 mm

91 mm



LAMP	LED
NOMINAL LUMEN	2300
REAL LUMEN OUTPUT	1360
WATTAGE	20W
VOLTAGE	207-240V 50/60Hz
IP	IP 65
IK	IK10 (20 joules)
CLASS	 Classe I
CERTIFICATION	
CONFORMITY	EN 60598-1 +2-1
LED ENERGY CLASS	E

Outdoor lighting fixture for wall installation

Dissipating disc in low copper content die-cast aluminium

Photo-etched polycarbonate diffuser to prevent side glare and to grant a homogeneous effect with 360° diffused light

Light source: mains voltage LED module, compatible with most phase-cut dimmers / CRI≥80

Cone in die-cast aluminium with low copper content; its harmonious shape contains the wiring and guides the luminous flux towards the wall

5558: compatible with beam limiter (code 5555)

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating

ON REQUEST:

24V low voltage version (code + 24V)

Finishing colours: BI - white / CO - corten / BR - bronze