

## IANUS 120 – H 600 – bi-emission

datasheet

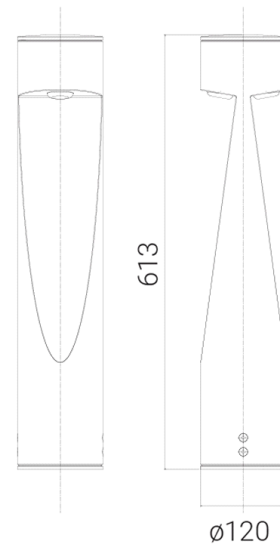
CODE NO. 7074




**AN** AN = Anthracite  
**AG** AG = Aluminum Grey

**27K (2700K) / 3K / 4K**

Ø 120 mm

H 613 mm



LAMP	LED
REAL LUMEN OUTPUT	1030
WATTAGE	15W
VOLTAGE	220-240V 50/60Hz
IP	IP 66
IK	IK10 (20 joules)
CLASS	 Classe I
CERTIFICATION	 
CONFORMITY	EN 60598-1 +2-1
LED ENERGY CLASS	E

Pole for garden and urban lighting

Structure entirely in low-copper grade primary aluminium alloy

LED light source inside the photo-etched lenticular opal diffuser for a wide and uniform light distribution / CRI 80

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 entry for additional wiring, positioned in the lower part of the closing cap in technopolymer

Color matching side-locking stainless steel screws

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating

ON REQUEST:

Dimmable version

Finishing colour BR - bronze