

PC PENDANT

PRODUCT FACT SHEET



HAY

PC PENDANT


DESIGN BY PIERRE CHARPIN, 2019

Pierre Charpin's PC Pendants is a collection of refined suspension lighting that can be used independently or clustered together. The pendants are constructed in anodised aluminium, which makes the surface more resistant to corrosion. The light source in each pendant lamp is hidden by a removable polycarbonate moulded diffuser, creating both a soft directional output of light and determining the form of the lamp itself. The PC Pendants are available in a variety of sizes and colours, and are suitable for both contract and domestic markets.

HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of refined pendants, task lights, table and portable lamps.
- CE approved.
- Designed for use with a replaceable standard retro fit LED dimmable bulb.
- The fitting can be used in conjunction with a number of standard wall mounted dimming control units.
- Suitable for both private and office environments.

DIMENSIONS

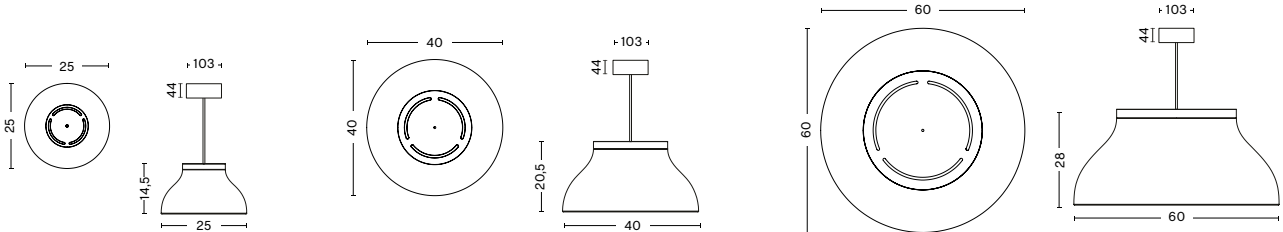

SMALL
WIDTH 25 CM
DEPTH 25 CM
HEIGHT 14,5 CM

MEDIUM
WIDTH 40 CM
DEPTH 40 CM
HEIGHT 20,5 CM

LARGE
WIDTH 60 CM
DEPTH 60 CM
HEIGHT 28 CM

MATERIALS

SHADE
Anodised spun aluminium shade.

DIFFUSER
Injection moulded translucent polycarbonate diffuser.

CABLE
Braided fabric cable with a PVC insulation.
Please note that the cable is black for all colour options.

COLOUR & FINISH

Please note that the colour codes are indicative.

		SMALL	MEDIUM	LARGE
SHELL	SIZE			
	SOFT BLACK	●	●	●
	EMERALD GREEN	●	●	●
	BLUSH RED	●	●	●
	ALUMINIUM ANODISED	●	●	●

PC PENDANT SMALL

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	DIMMABLE	POWER SUPPLY	IP	CORD LENGTH	SWITCH
3 x LED G9, 3-5W (max. 5W), 300-600lm, 2700-3000K warm white	Yes**	220-240V AC at 50/60Hz	20	400 cm	No

*Bulb not included.


**If used in conjunction with a wall mounted dimmer and suitable LED bulb.

TEST SPECIFICATION OUTPUTS*

FLUX (LUMENS)	CCT (KELVIN)	CRI (1-100)
625lm	2700K warm white	85

*Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

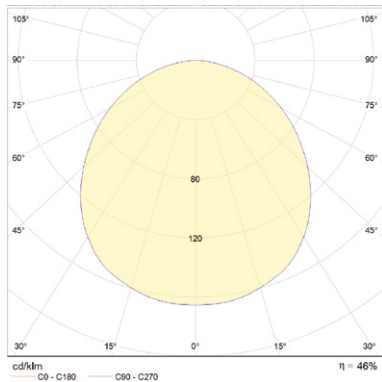


PHOTOMETRICS



CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED  IP20  

Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)

PC PENDANT MEDIUM

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	DIMMABLE	POWER SUPPLY	IP	CORD LENGTH	SWITCH
LED 27 (A19), 10-13W (max. 13W), 1000-1500lm, 2700-3000K warm white	Yes**	220-240V AC at 50/60Hz	20	400 cm	No

*Bulb not included.


**If used in conjunction with a wall mounted dimmer and suitable LED bulb.

TEST SPECIFICATION OUTPUTS*

FLUX (LUMENS)	CCT (KELVIN)	CRI (1-100)
900lm	2700K warm white	85

*Photometrics and the test specification shown is taken using the recommended LED bulb fitted in the production luminaire.

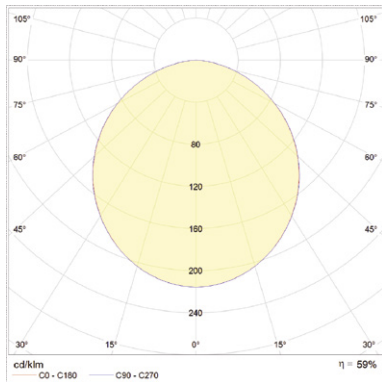

PHOTOMETRICS



CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED  IP20  

Tested according to the following european EN IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)

PC PENDANT LARGE

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	DIMMABLE	POWER SUPPLY	IP	CORD LENGTH	SWITCH
3 x LED 27 (A19), 10-13W (max. 13W), 1000-1500lm, 2700-3000K warm white	Yes**	220-240V AC at 50/60Hz	20	400 cm	No

*Bulb not included.


**If used in conjunction with a wall mounted dimmer and suitable LED bulb.

TEST SPECIFICATION OUTPUTS*

FLUX (LUMENS)	CCT (KELVIN)	CRI (1-100)
900lm	2700K warm white	85

*Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

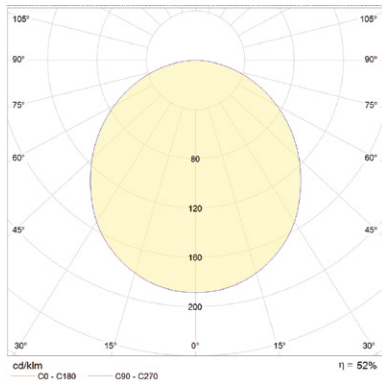

PHOTOMETRICS



CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED  IP20  

Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including:

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)