


FLOOT 33W 30K 70°

Code: 3915-01-06

Single light lamp provided with a 70° beam. Bell-shaped diffuser in translucent polycarbonate. Ceiling base in die-cast aluminium, polyester painted. Suspension wires in steel, 2 meters long, adjustable with automatic devices. It can be applied on 3-phase LKM tracks, through the proper adapters.

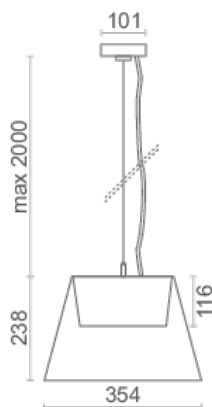

General specifications

Designer	Ivela Design Team
Installation environment	Interior
Native mounting type	Suspension
Mounting type	Suspension
Ideal application locations	Residential, Uffici
Wire incandescent test	850
Made in	Italy

Physical specifications

Shape	Irregular
Body finish	Translucent
Body color	White
Frontal finish	Translucent
Frontal color	White
Thermal dissipation	Passive
IP	IP20
Waterstop	No

Lighting specifications

N° of light sources	1
Luminous luminaire (lm)	5873
L.O.R. (%)	89

Power / Consumption (W)	51
W source	51
Light type	White
Color Temperature	3000K
CRI	85
SDCM	3
Life time	L90B50
LB value @ h	50000
N° LEDs / modulo	1

Optical specifications

Emission type	Direct monoemission
Light beam distribution	Symmetric
α (°)	70
Orientability	Fixed

Electrical specifications

Power supply availability	Included
Power supply type	Current
Insulation class	I
Light source type	LED COB

Dimensions and weight

Height / Thickness (mm)	238
Diameter (mm)	354

General conditions

Warranty	5 years
----------	---------