


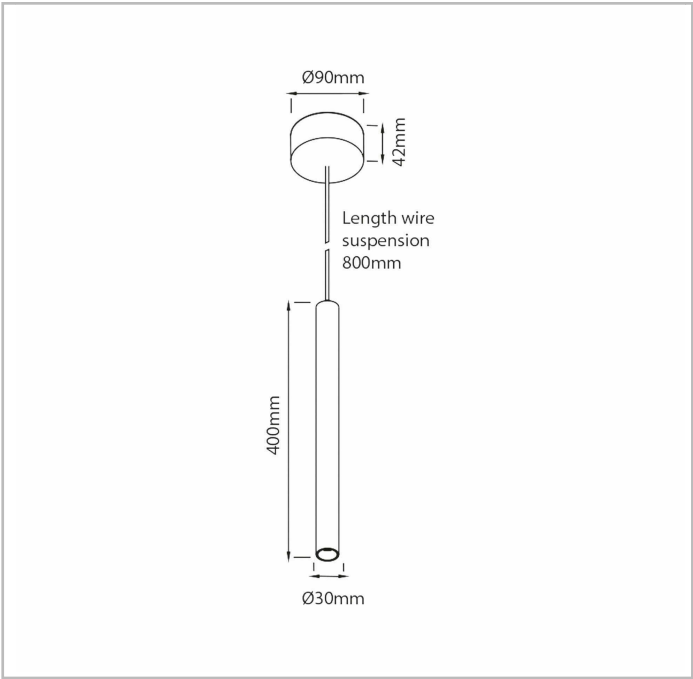

|                             |                       |
|-----------------------------|-----------------------|
| SKU                         | : 503BB92730F0        |
| Housing material            | : Aluminum Die Cast   |
| Luminaire color             | : Black               |
| Optic                       | : Lens                |
| Reflector color             | : N/A                 |
| Power supply                | : Included ON/OFF     |
| Luminaire dimension         | : Ø30x400mm           |
| Cut out dimension           | : N/A                 |
| Luminous Flux               | : 380lm               |
| LED power                   | : N/A                 |
| System power                | : 6W                  |
| System efficiency           | : 63lm/W              |
| Beam angle                  | : 30°                 |
| CCT                         | : 2700K               |
| CRI                         | : 90                  |
| Chromaticity tolerance      | : 3 MacAdam           |
| Nominal fA [mA]             | : N/A                 |
| Nominal fV [V]              | : N/A                 |
| Mains Voltage               | : 220-240V / 50 -60Hz |
| El. Class                   | : Class II            |
| Lifetime                    | : 50000h              |
| IP rating                   | : IP20                |
| Light source energy class   | : F                   |
| Light source identifier     | : BXRH-27G1000-B-73   |
| Net. Weight                 | : 0.6Kg               |
| Certificates / Declarations | : CE/UKCA             |
| Warranty                    | : 3Y                  |

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K. Technical data can change without prior notice.