


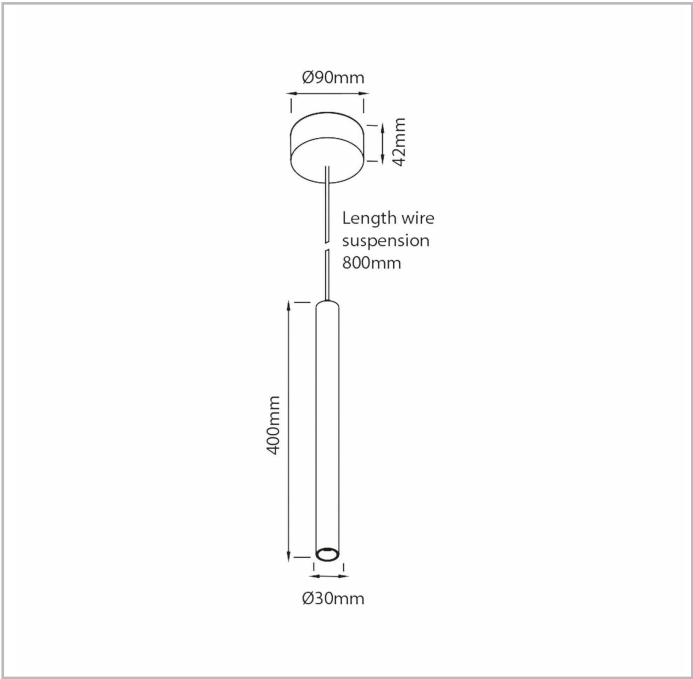

SKU	: 503BB93030F0
Housing material	: Aluminum Die Cast
Luminaire color	: Black
Optic	: Lens
Reflector color	: N/A
Power supply	: Included ON/OFF
Luminaire dimension	: Ø30x400mm
Cut out dimension	: N/A
Luminous Flux	: 400lm
LED power	: N/A
System power	: 6W
System efficiency	: 67lm/W
Beam angle	: 30°
CCT	: 3000K
CRI	: 90
Chromaticity tolerance	: 3 MacAdam
Nominal fA [mA]	: N/A
Nominal fV [V]	: N/A
Mains Voltage	: 220-240V / 50 -60Hz
El. Class	: Class II
Lifetime	: 50000h
IP rating	: IP20
Light source energy class	: F
Light source identifier	: BXRH-30G1000-B-73
Net. Weight	: 0.6Kg
Certificates / Declarations	: CE/UKCA
Warranty	: 3Y

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K. Technical data can change without prior notice.