

LUZ-W31 105.840.AS/DALI



Description

- wall luminaire for indirect lighting
- asymmetrical light distribution beaming forward
- outstanding ease of maintenance
- no UV and thermal emissions
- housing and mounting box made from sheet steel
- lens optics made from matt PMMA
- direct screwing on of the mounting box on wall
- 5-pole terminal block
- ballast (LED converter DALI, dimmable) integrated

Lighting data / Norms




System power	36.6 W
Luminaire luminous flux	5390 lm
System efficiency	147.26 lm/W
UGR class	≤16
Beam range	Asymmetric
Beam angle	Asymmetric
Supply voltage	220 - 240 V / 50 - 60 Hz
Protection class	I
Type of protection	IP20

Dimensions / Weights

Length	301 mm
Width	212 mm
Height	160 mm
Net weight	1.76 kg
Gross weight	1.85 kg




Colours	Article no.	EAN
silver	667496	4043544768018
black	667497	4043544768025
white	667498	4043544768032

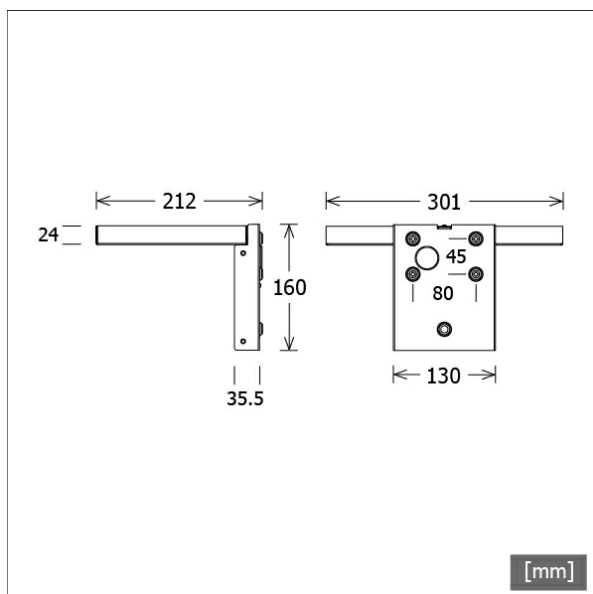

LUZ-W31 105.840.AS/DALI

LUZ-W31 105.840.AS/DALI

LUZ | Wall (1xLED 37W 840/4000K 5390lm)



	C0	C90	C180	C270
0°	582	582	582	582
15°	412	538	789	538
30°	204	379	515	379
45°	95	202	198	202
60°	68	100	70	100
75°	62	45	24	45
90°	3	0	0	0
cd / 1000 lm				

LDC unsuitable for cone representation.
Asymmetric LDC.

η	LED
Efficiency	146 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	37 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.7
UGR C90/C270	26.2
CIE Flux Codes	66 88 97 100 100
Ra/CRI	>80

LTS

Accessories

ZB-OR DONGLE

Organic Response IR dongle kit

ZB-OR GATEWAY

Organic Response IoT Gateway Cascade Series

ZB-OR-A SENSOR/DALI

Organic Response sensor for surface mounting

ZB-OR-P SENSOR/DALI/3000

Organic Response sensor for pendant mounting