

M3Z

Static White
10° - 30° Zoom



Project Name

Type



Input Requirements

1800/1550 Lumens	120VAC/0.19A/23W
	240VAC/0.12A/25W
1300/1100 Lumens	120VAC/0.15A/19W
	240 VAC/0.08A/19W

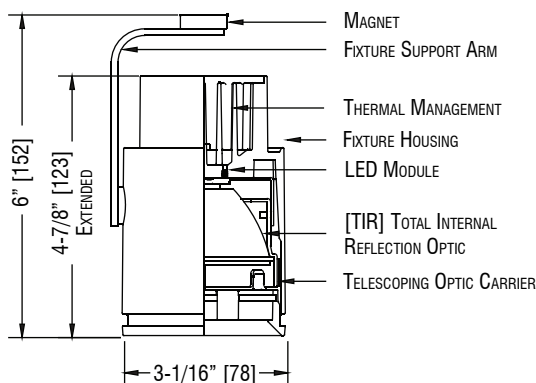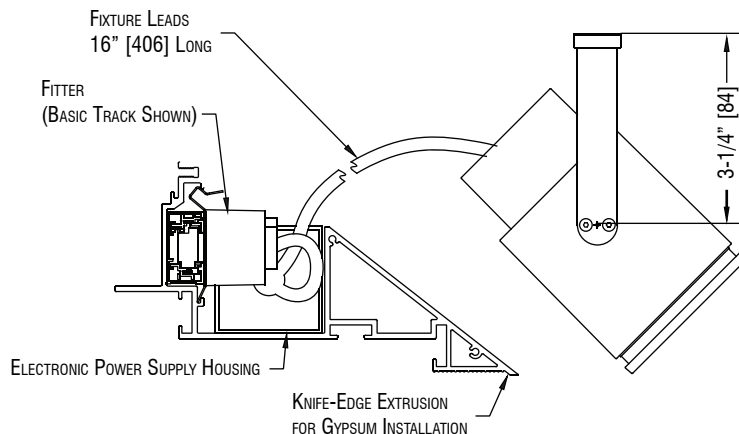

Enter Catalog Number Sequentially from Left to Right

M3Z - - -

Model	Lumens/CRI	CCT	Adaptor	Dimming	Level	Options	Voltage	Finish
M3Z	L18 1800/92	27 2700	BT Basic Track	E ELV	0 10%	N/A	A 120	P White
	L15 1550/98	30 3000					D 240	MB Black
	L13 1300/92	35 3500	ST2 2-Circuit Stucchi	Z 0-10	D Dark		C 277	CP Custom
	L11 1100/98	40 4000	ST3 3-Circuit Stucchi	M DMX				
				D DALI				

Dimming Note

This fixture is provided with LED Drivers suitable for the dimming protocol specified. Dimming performance may vary based on dimmer model or system being used. If exact dimming performance is required, Litelab recommends testing the Litelab fixture with the specified dimmer.

Accessories: See Page 3

- ☐ OL-DF-g Beam Softening Film
- ☐ OL-TD-g Beam Softening Lens
- ☐ OL-10x40-g Linear Spread Lens
- ☐ OL-10x60-g Linear Spread Lens
- ☐ OL-30x60-g Universal Spread Lens
- ☐ LVH/g Hexell Louver



251 Elm Street, Buffalo, NY 14203 USA
800-238-4120 | www.litelab.com



M3Z


Static White
10° - 30° Zoom

Project Name


Type

Details

M3Z Fixture shown in H06 Housing

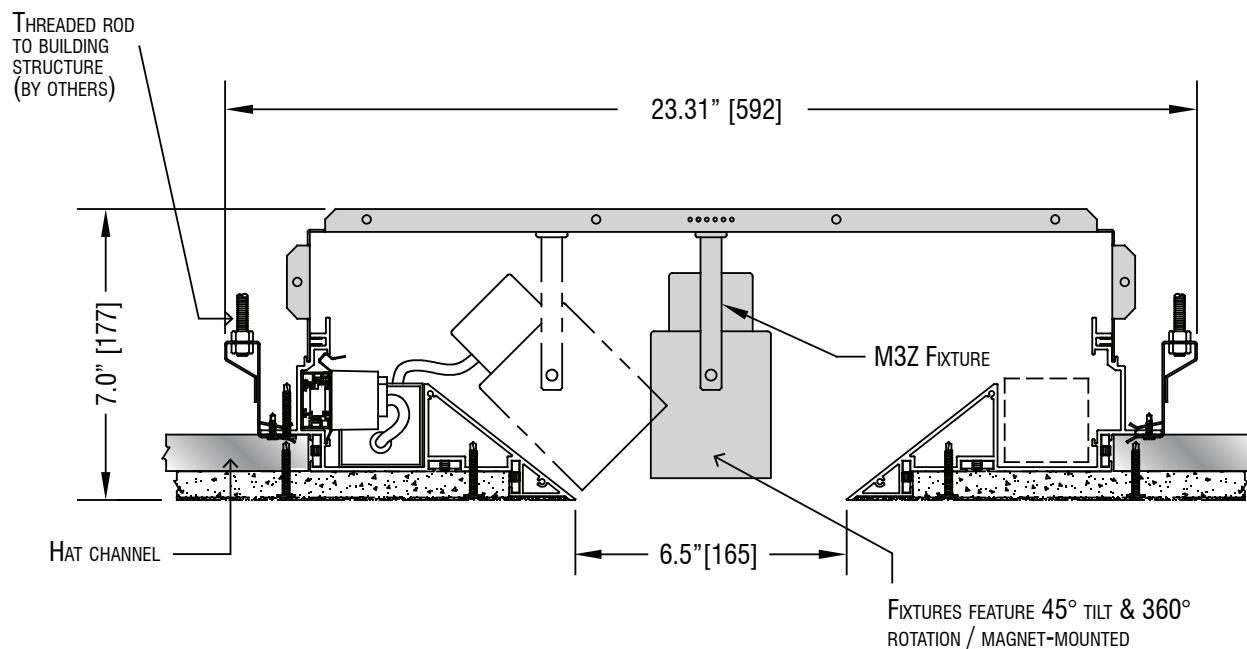

M3Z FIXTURE SHOWN
IN H06 HOUSING

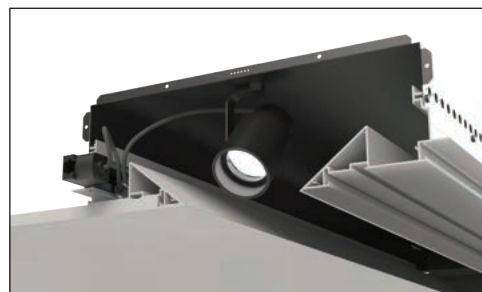

Accessories

CUSTOM DISTRIBUTION FILMS AVAILABLE ON REQUEST.



SIZE CODE G: 2.529" [64MM]

DIFFUSION FILM: 0.25MM (0.01") FILM SOFTENS BEAM EDGES

TEXTURED DIFFUSION LENS: 3MM (0.1") TEXTURED LENS SOFTENS BEAM EDGES



OL-DF-G (DIFFUSION FILM)

DISTRIBUTION DIAGRAM



OL-TD-G (POLYCARBONATE DIFFUSION LENS)

DISTRIBUTION DIAGRAM







40° LINEAR SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT LINEARLY FOR LONG OBJECTS

60° LINEAR SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT LINEARLY FOR LONG OBJECTS

OL-10x40-G (LINEAR SPREAD LENS)

OL-10x60-G (LINEAR SPREAD LENS)



UNIVERSAL SPREAD LENS: 3MM (0.1") LENS SPREADS LIGHT UNIVERSALLY FOR WIDER DISTRIBUTION

HEXCELL LOUVER: REDUCES HIGH-ANGLE GLARE TO PROVIDE COMFORTABLE LIGHTING

OL-60x30-G (UNIVERSAL SPREAD LENS)

LVH/G (HEXCELL LOUVER)

