




Mounting
Floor
Body
iron's sheet head, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.
support pole made by extruded aluminium
Basement made by iron's sheet
Light emission
Direct + indirect
Symmetric
Optical device
Indirect: polycarbonate transparent diffuser
Direct: methacrylate microprismatic transparent diffuser
Light source
CRI ≥ 80
Color tollerance: 3 Step MacAdam
Durata utile 80000 ore L80B20
Wiring
Class I st
Feeding 220~240V Ac 50-60 Hz
Pefomance data
Protection rate: IP20
UGR ≤ 19
Normatives
EN 60598-1
EN 60598-2-4
Photobiological safety
EN 62471
IEC/TR 62778
Exempt risk – GR 0
Directves
2014/35/UE
2014/30/UE
UPON REQUEST VERSIONS
DALI dimmable electronic ballast
LED CRI ≥ 90
Daylight + presence sensor

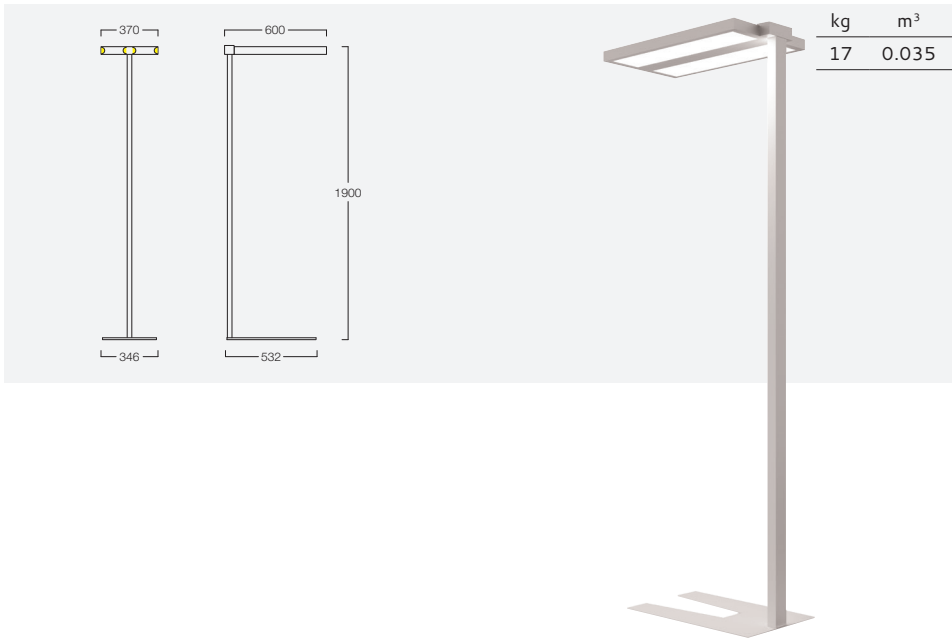

kg	m³
17	0.035

K	mA	lm IN	lm OUT	W	cod. ELE	cod. ELE + SENS
3000	350	10272	8198	62,4	8470WW68B	8470WW68BS
4000		10832	8645		8470NW68B	8470NW68BS

