




Mounting
Wall
Body
in sheet steel, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment
Light emission
Direct + Indirect
Symmetric
Optical device
Satin methacrylate diffuser
Light source
CRI ≥ 80
Color tolerance: 3 Step MacAdam
Lifetime: 80000hrs L80B20
Wiring
Class I st
Feeding 220 ~ 240V Ac 50-60 Hz
Performance data
Protection rate: IP40
Regulations
EN 60598-1
EN 60598-2-1
Photobiological safety
EN 62471
IEC/TR 62778
Exempt risk – GR 0
Directives
2014/35/UE
2014/30/UE
UPON REQUEST VERSION
DALI dimmable electronic ballast
Emergency unit: 1h
LED CRI ≥ 90



K	mA	lm IN	lm OUT	W	cod. ELE
3000	500	3508	1276	22,8	8521WW25B
4000		3696	1344		8521NW25B
3000	350	5136	1868	31,2	8521WW32B
4000		5416	1970		8521NW32B

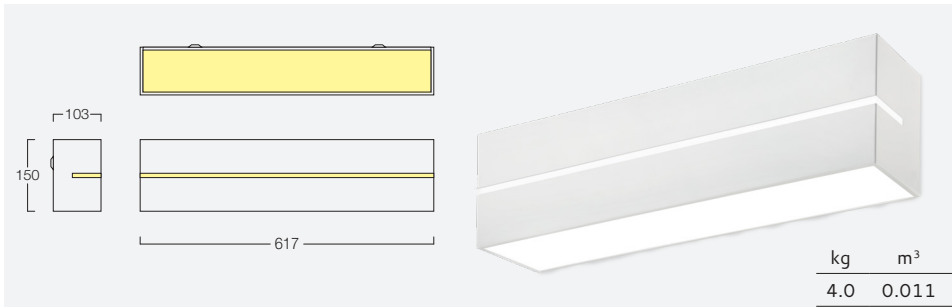