
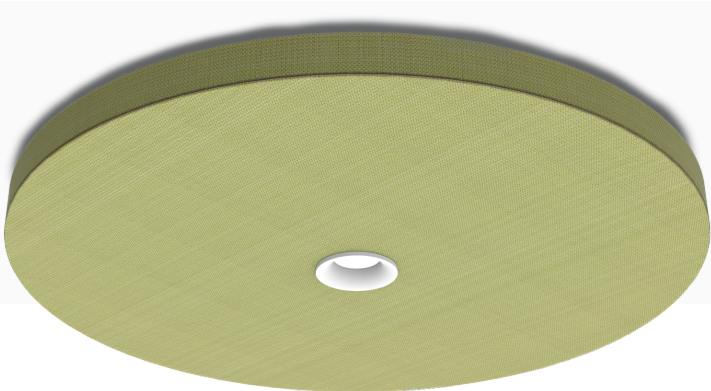


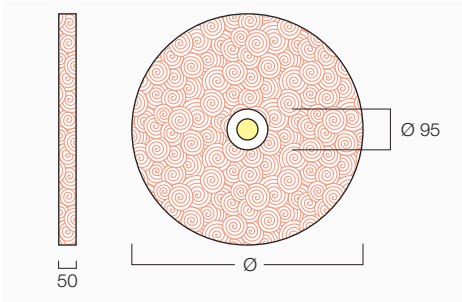


Mounting
Ceiling
Suspended with acc. 4417SP1-3 + 4406
Body
De-cast aluminium powder coated
Light emission
Direct
Symmetric
Optical device
Specular anodised aluminum reflector
Light source
CRI ≥ 80
Wiring
Class I st
Feeding 220~240V Ac 50-60 Hz
Performance data
Protection rate: IP20/43
Normatives
CEI EN60598-1
CEI 34-21
Directives
2006/95/CE
2004/108/CE
UPON REQUEST VERSION
CRI ≥ 90

K	mA	lm IN	lm OUT	W	Ø	Kg	m³	COD.
3000		1970	1458	12,5	600	2.6	0.020	
4000		2080	1540					
3000	350	1970	1458	12,5	800	5.3	0.035	
4000		2080	1540					
3000		1970	1458	12,5	1200	5.3	0.080	
4000		2080	1540					

Dial the product code according to your needs, following the order indicated in the table below.

ART	mA	K	Ø	WIRING				COLOR	FABRIC
	3	WW	0600					B	
	(350)	(3000)							
9760			0800	EO	DD	EM	DDM	G	fabric's code on the next page
				(in/off)	(DALI)	(on/off + emergency)	(DALI + emergency)		
	5	NW	1200					N	
	(500)	(4000)							

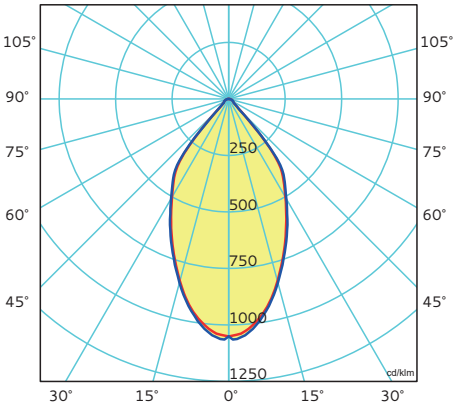

Soundproofing material
Thickness: 50mm
Acoustic absorption coefficient
α_w 0.85
Lining
Single-sided in recyclable fabric (100% poliestere)
Fire reaction class
B-s1, d0
Normatives
UNI EN ISO 12947:2000 - 60.000 cicli $\pm$ 20%
UNI EN ISO 105 B02 6 $\pm$ 1 (Xenotest)
Certifications
Oeko-Tex Standard 100

