





$\eta_{ef}$  (lm/W)  
112



FSQ

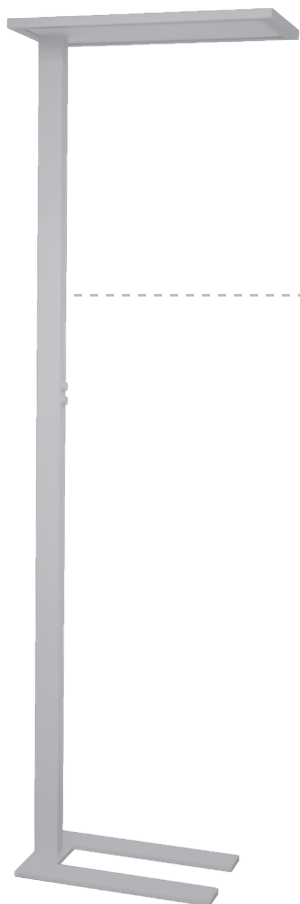

FSQ

## Free-standing LED fitting

### Body:

aluminium profile, steel base finished in grey RAL9006, also available in white or black on request

### Optic:

Microprismatic / Opal cover  
Direct / indirect light distribution

### Application:

Free-standing luminaires can be positioned in any location in the room, at any position relative to the task area  
Luminaire height 2m

### Functions:

Touch dim + Proportional switch - to change a ratio of direct and indirect light  
Indirect/direct light can be switched/dimmed separately  
FSQ.../SC - fitting with integrated light sensor

	W	lm	kg
FSQ6000RS4KNDI/TD	52	5 800	10
FSQ8000RS4KNDI/TD	80	8 500	10

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	×	○	×	×
ON/OFF	1-10V	DALI	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth
×	×	●	○	×	○	×	×	●

● default

○ optional

×

