



η_{ef} (lm/W)
104-133



CUBE



CUBE B50



CUBE B80

LED fittings

Body:

Painted aluminium profile

B - white RAL9003

C - black RAL9005

S - grey RAL9006

Optic:

PC reflector + clear PMMA lenses

B - white reflector - bright

B M - white reflector - mat

C - black reflector - bright

C M - black reflector - mat

50 - narrow beam 50°

80 - wide beam 80°

Application:

Intended to illumination of representative work places, residential applications or decorative lighting.

Variants:

CUBE P = ceiling surfaced fitting

CUBE Z = pendant fitting

CUBE D = recessed fitting


2200	2700	3000	4000	5700	6500	MIX	RGB	
×	○	○	●	○	×	×	×	●
●	×	○	×	×	×	×	×	×

● default

○ optional


×

not possible

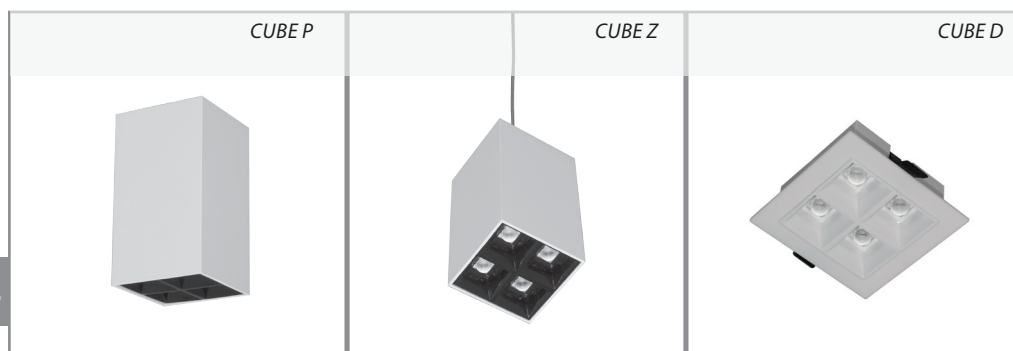

Code : CU1000P3BC80/ND

CU	1000	P	3	B	C80	/ND
Luminaire type	Light output	Installation P = ceiling Z = pendant D = recessed	Color temperature 2=2700K, 3=3000K, 4=4000K, 5=5700K	Body color B – white body C – black body S – grey body	Optic: B – white louvre B M – white reflector - mat C – black louvre C M – black reflector - mat 50 – narrow beam 50° 80 – wide beam 80°	Driver type: ND – no dimmable DALI – rdimmable DALI

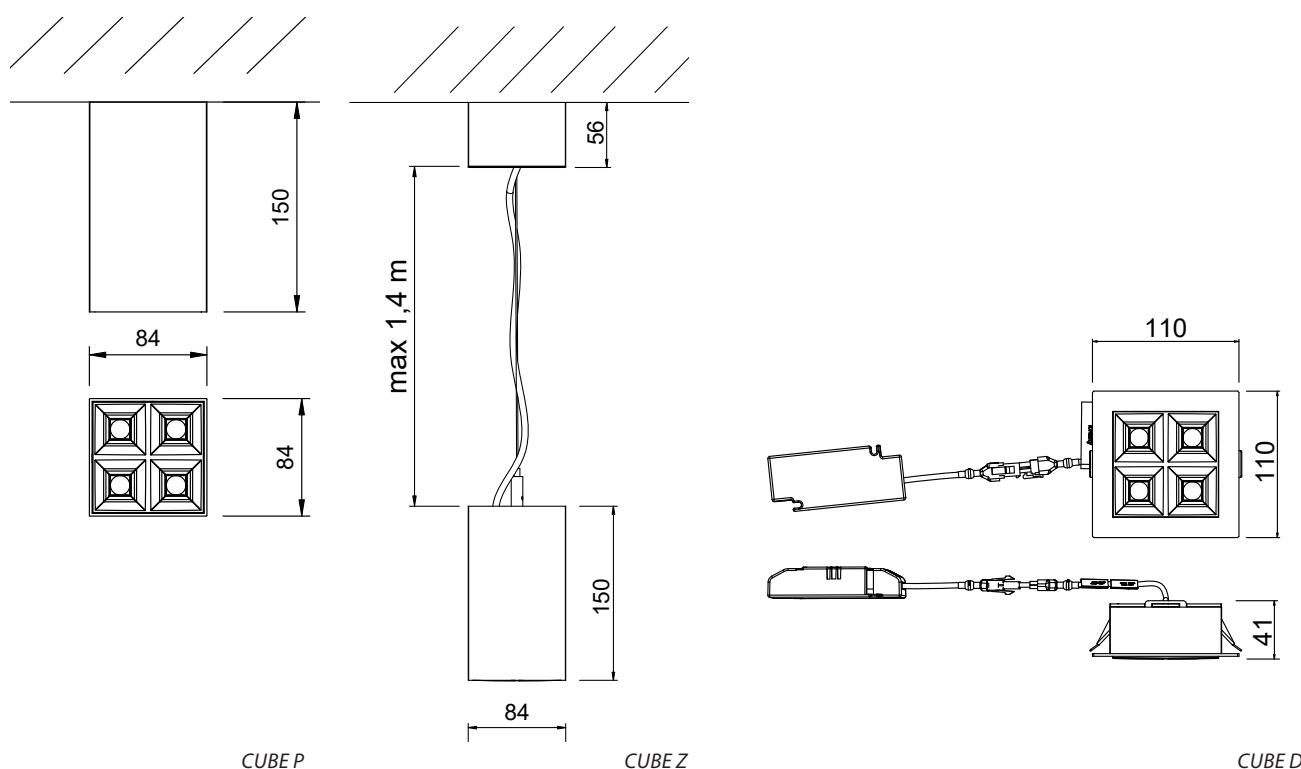

CUBE P	W	lm		A	B	C	kg
		B50, B80	C50, C80				
CU1000P	9	1 200	1 100	84	84	150	0,6
CU1500P	14	1 600	1 450				

CUBE Z	W	lm		A	B	C	kg
		B50, B80	C50, C80				
CU1000Z	9	1 200	1 100	84	84	150	1,0
CU1500Z	14	1 600	1 450				

CUBE D	W	lm		A	B	C	□ 	kg
		B50, B80	C50, C80					
CU1000D	9	1 200	1 100	110	110	41	95x95	0,25
CU1500D	14	1 600	1 450					

lm - luminaire light output

Due to MODUS program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to + / - 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.