

M1
11.14414-9999

Fixture details

Mounting	table/writing-desk
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details



Lamptype	LED 4000K
Wattage	9,6W
Gross luminous flux	2010
Luminaire power	10,6W
Number	1
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	80

Photometric details

CIE Fluxcode	49 80 96 100 66
--------------	-----------------

Dimensions

A	390 mm
B	400 mm
C	330 mm

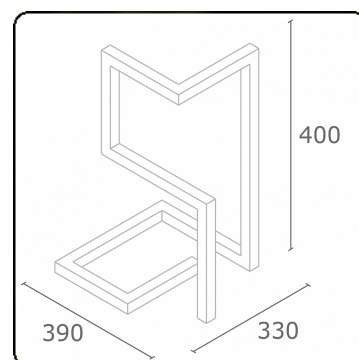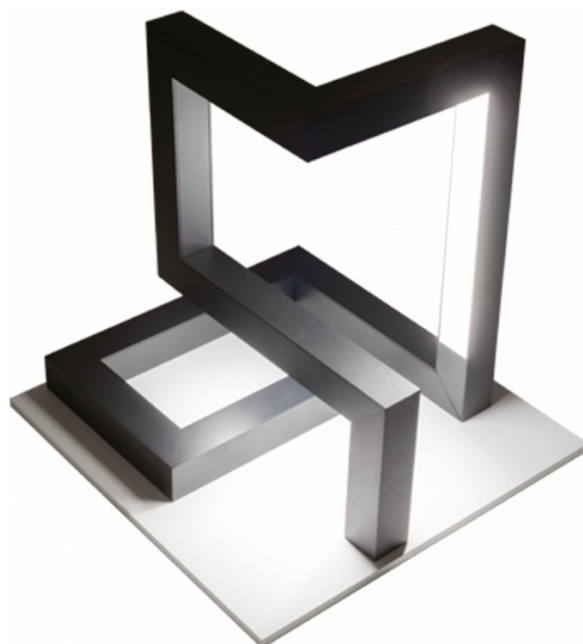

ENERG

A



Verkrijgbaar op aanvraag.

B

Disponible sur demande.

C

D

Available on request.

E

F

Auf Anfrage.

G

G

WXYZ
kWh/1000h

MULTILINE®

2019/2015