

Bic 02

Harbour design 2017

*Recessed square downlight with trim. Available in two versions:
for plasterboard (without housing) and for brickwork (compulsory housing).*


*Incasso quadrato con bordo. Disponibile nelle versioni per cartongesso
(senza cassaforma), e per muratura (cassaforma obbligatoria).*

*Quadratische Einbauleuchte mit Rand. Lieferbar in den Versionen für Gipskarton
(ohne Gehäuse) und für Mauerwerk (Gehäuse zwingend notwendig).*

*Luminaire carré encastré avec collerette. Disponible dans les versions pour cloison en
placoplatre (sans boîte d'encastrement) et pour mur de brique (boîte d'encastrement obligatoire).*

*Empotrable cuadrado con borde. Disponible en las versiones para falso techo
(sin cajetín) y para ladrillo (cajetín obligatorio).*






For plasterboard. Per cartongesso

IP40	MC-E=3	CE	V	⬇
500lm/A	LED 6W	CRI>90		
B02.2 ■ S. □	P = 2,0cm			
B02H.2 ■ S. □	P = 1,5cm			
<i>With honeycomb. Con frangibile</i>				
■ <i>Led color</i>	<i>Nominal lm</i>	<i>Beam spread</i>		
2 = 2700 °K	528	S = 22°		
3 = 3000 °K	552			
4 = 4000 °K	594			


© (m-M)	Converter
DRV500.15 (1-1)	on/off
DRV501.50 (1-7)	DALI - Push - 1...10V (Remote installation)
DRV502.20 (1-3)	DALI (Remote installation)
DRV503.20 (1-3)	Push - 1...10 (Remote installation)
DRV504.10 (1-1)	IGBT - TRIAC



For brickwork. Per laterizio

IP40	MC-E=3	CE	V	
500lm/A	LED 6W	CRI>90		
B2M.2 ■ S. □	P = 2,0cm			
B2MH.2 ■ S. □	P = 1,5cm			
<i>With honeycomb. Con frangibile</i>				
■ <i>Led color</i>	<i>Nominal lm</i>	<i>Beam spread</i>		
2 = 2700 °K	528	S = 22°		
3 = 3000 °K	552			
4 = 4000 °K	594			


© (m-M) Converter
DRV500.15 (1-1) on/off



Housing for brickwork. Cassaforma per laterizio

M02.050.01


	<i>Frame - Struttura</i>
02 	Black - Nero
06 	White - Bianco
C 	Copper - Rame
S 	Brass - Ottone



For plasterboard. Per cartongesso

IP40		MC-E-3			
350lm/A		LED 11W	CRI>85	H = 9,2	
B02.3 		P = 2,6cm			
B02H.3 		P = 2,1cm			
<i>With honeycomb. Con frangulice</i>					
 <i>Led color</i>	<i>Nominal lm</i>		 <i>Beam spread</i>		
2 = 2700°K	1195		S = 22°		
3 = 3000°K	1257		T = 15°		
4 = 4000°K	1313				


© (m-M)	Converter
DRV350.1L (1-1)	on/off
DRV350.25 (2-2)	on/off
DRV351.40 (1-3)	DALI - Push - 1...10V (Remote installation)
DRV352.15 (1-1)	DALI
DRV353.15 (1-1)	Push - 1...10V
DRV354.18 (1-1)	IGBT - TRIAC



For brickwork. Per laterizio

IP40	MC-E=3	CE	V	Ⓢ
350lm/A	LED 11W	CRI>85		
B2M.3 ■■■ □	P = 2,6cm			
B2MH.3 ■■■ □	P = 2,1cm			
<i>With honeycomb. Con frangulice</i>				
■ <i>Led color</i>	<i>Nominal lm</i>	▤ <i>Beam spread</i>		
2 = 2700 °K	1195	S = 22°		
3 = 3000 °K	1257	T = 15°		
4 = 4000 °K	1313			


© (m-M)	Converter
DRV350.1L (1-1)	on/off
DRV350.25 (2-2)	on/off
DRV352.15 (1-1)	DALI
DRV353.15 (1-1)	Push - 1...10V
DRV354.18 (1-1)	IGBT - TRIAC



Housing for brickwork. Cassaforma per laterizio

M02.080.01

	<i>Frame - Struttura</i>
02	 Black - Nero
06	 White - Bianco
C	 Copper - Rame
S	 Brass - Ottone

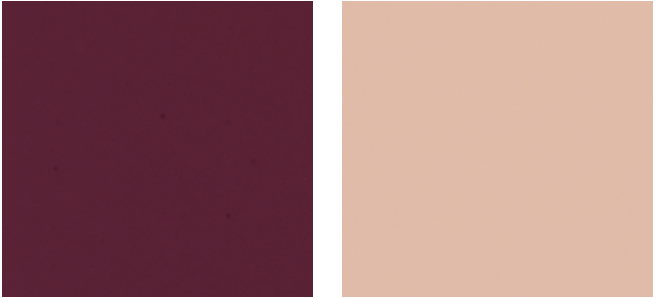

Red/Rosso


Rose/Rosa




Green/Verde



Blue/Blu



Brass/Ottone



Copper/Rame

The colour rendering of these samples is approximate, not being possible to faithfully reproduce by offset printing.

I campioni colore sono solamente indicativi, non essendo possibile la riproduzione fedele a mezzo stampa offset.

Durch den Offset-Druck sind leichte Farbabweichungen der hier gezeigten Muster möglich.

Les échantillons de couleurs sont indicatifs, l'impression papier ne permettant pas une reproduction fidèle.

Las muestras de color son sólo indicativas, no siendo posible una reproducción fiel mediante impresión en papel.

- Ⓐ

Alimentatore incluso
control gear included
Vorschaltgerät mitgeliefert
platine d'alimentation fournie
alimentador incluido
- Ⓑ

Alimentatore non incluso
control gear not included
Vorschaltgerät nicht mitgeliefert
platine d'alimentation non fournie
alimentador excluido
- Ⓒ

Converter incluso
Converter included
Konverter mitgeliefert
Convertisseur fourni
Convertidor incluido
- Ⓓ

Converter non incluso
Converter not included
Konverter nicht mitgeliefert
Convertisseur non fourni
Convertidor excluido
- Ⓕ

Lampadina inclusa
including bulb
Leuchtmittel inklusiv
ampoule comprise
bombilla incluida
- Ⓖ

Lampadina non inclusa
Bulb not included
Leuchtmittel nicht mitgeliefert
Ampoule non fourni
Bombilla excluida
- Ⓙ

Trasformatore incluso
transformer included
Trafo mitgeliefert
transformateur fournie
transformador incluido
- Ⓚ

Trasformatore non incluso
transformer not included
Trafo nicht mitgeliefert
transformateur non fournie
transformador excluido

IP identification

IP2X

protezione contro corpi estranei ≥ 12mm
protection against solid objects ≥ 12mm
Schutz gegen Fremdkörpern ≥ 12 mm
protection contre des corps étrangers ≥ 12mm
protegido contra objetos extraños ≥ 12mm

IP4X

protection against solid objects ≥ 1mm
protezione contro corpi estranei ≥ 1mm
Schutz gegen Fremdkörpern ≥ 1mm
protection contre des corps étrangers ≥ 1mm
protegido contra objetos extraños ≥ 1mm

IPX0

nessuna protezione
no protection
kein Schutz
non protégé
sin protección

“Creativity is inventing, experimenting, growing, taking risks, breaking rules, making mistakes, and having fun.”

Mary L. Cook