

Zen

GRD04000 - 2,2 W / 3000 K


DESCRIPTION

ZEN belongs to the new generation of eco-friendly products, utilizing solar energy to power the LED board. It is self-sufficient and does not require a connection to the electrical grid. The fixture incorporates various technological elements, including a photovoltaic cell and a highly reliable lithium battery that ensures long-lasting illumination autonomy. Integrated in the LED board an ON/OFF switch that enables operation in "SMART light" mode: the brightness sensor activates the lamp at 20% when the ambient light is less than 20lux. The presence sensor increases the brightness to 100% only when detecting people within 6 meters of the device. The lamp body is made of powder-coated metal, resistant to external agents and UV radiation. The LED diffuser is made of polycarbonate. The luminous flux of the LED group is directed downwards to prevent direct glare. The fixture comes with a metal bracket for surface installation. Among the accessories, there is also a ground stake for anchoring it to grassy or loose soil.



PRODUCTS CHARACTERISTICS

installation type	bollard
Color	antracite
Power	2,2 W
Lumen output - Full emission	150 lm
Efficacy	68 lm/W
Dimensions	h 340 cm.
net weight	1,96 kg

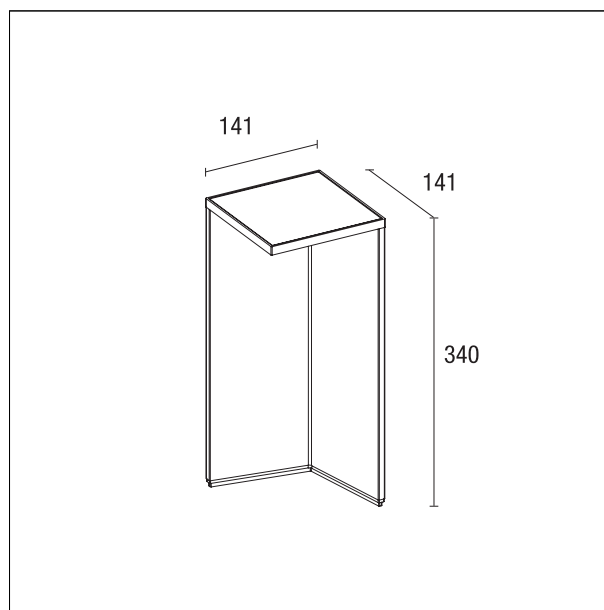

ELECTRICAL CHARACTERISTICS

feeding	3,7 V DC
driver	On+Off
Insulation class	Classe III

Zen

GRD04000 - 2,2 W / 3000 K

MECHANICAL CHARACTERISTICS

product IP rate	IP54
IK	IK05

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K

LIGHTING DETAILS

optic	Diffusa
-------	----------------