


BOLLARD LUMINAIRE

PEBBLE

Version 01

Pebble is a bollard luminaire that is installed on the ground usually in the pathway and landscape area.

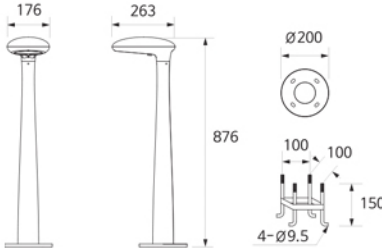


Technical Data

Color temperature(K)		10W	
3000K 4000K			
Protection class			
IP65			
Controls			
On/Off			
Certifications			
Registration of Broadcasting and Communication Equipments			
Features	Light source	High-performance LED	
	Luminaire luminous flux (based on 3000K)	675 lm	
	Luminaire efficacy	67 lm/W	
	Color temperature	3000K, 4000K	
	CRI	Ra ≥ 80	
Physical	Housing material	Cast aluminum	
	Cover material	Clear tempered glass	
	Lens material	Polycarbonate	
	Gasket material	Silicone gasket	
	Finish	Dark gray (powder-coated) color	
	Size	176(W) x 876(H) x 263(D)	
	Weight	5.4 kg	
Electrical & Control	Power consumption	10W	
	Input voltage	220~240Vac 50~60Hz	
	Control	On/Off Switchable	
	Power factor	≥0.90	
	Power supply	Integral driver	
Environmental	Operating temperature	-30℃ to 50℃	
	Storage temperature	-40℃ to 70℃	
	Ingress protection rating	IP65	

Photometric Data

Power Consumption: 10W

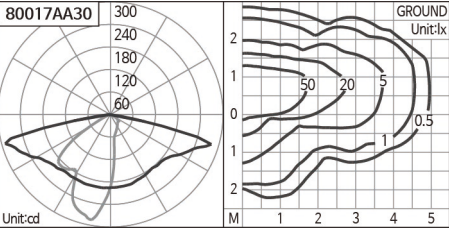

CCT (K)	3000K	4000K
Luminous Flux (lm)	675	>675

Ordering

Code	W		K	Finish	Size(mm)	Control
	10W		3000K	Dark gray	176 x 876 x 263	On/Off
			4000K			

Code	W	lm	K	Finish	Size(mm)	Control
80017AA30	10W	675	3000K	Dark gray	176 x 876 x 263	On/Off
80017AA40	10W	>675	4000K	Dark gray	176 x 876 x 263	On/Off