






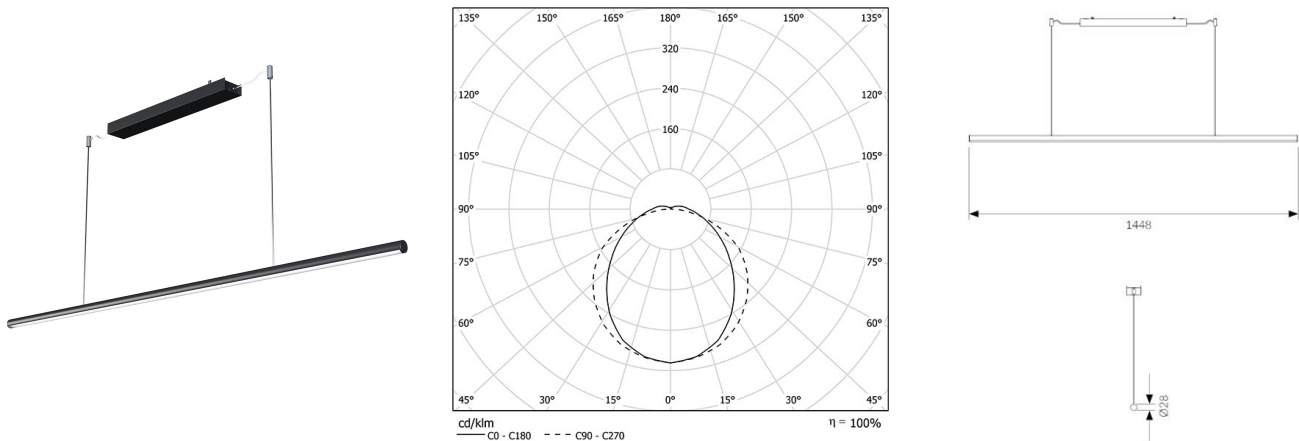

PIPE LINE MONO PG

Methacrylate satin diffuser for soft diffusion with UGR<22.



CODE		FLUX	SIZE	CERTIFICATIONS
86PG31K4M	31W 4000K	4092lm	1448mm	    

Optics

Methacrylate satin diffuser for soft diffusion with UGR<22.

Specifications

CRI>90
Mac Adams 3
Life Time: L80/B10 >50.000h
5 years complete warranty
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Spun aluminum with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97