


## PIPE LINE MONO PG

Methacrylate satin diffuser for soft diffusion with UGR<22.

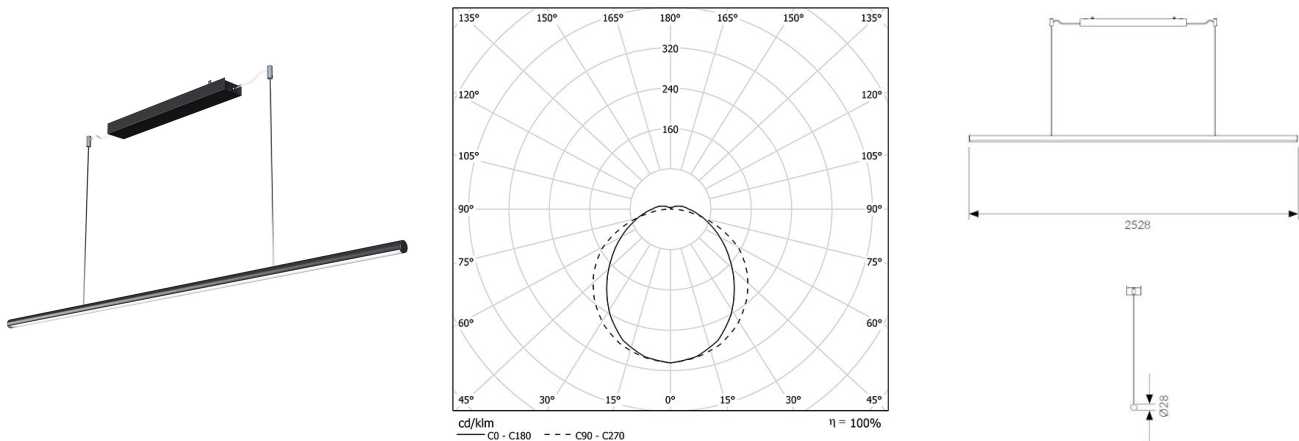

| CODE      |  | FLUX   | SIZE   | CERTIFICATIONS  |
|-----------|---|--------|--------|---|
| 86PG54K4M | 54W 4000K   | 7128lm | 2528mm |      |

### Optics

Methacrylate satin diffuser for soft diffusion with UGR<22.

### Specifications

CRI>90  
Mac Adams 3  
Life Time: L80/B10 >50.000h  
5 years complete warranty  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Spun aluminum with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97