


HB 106

611985.0031 | Wall luminaires



Wall luminaires
4051859152026
L 80, B 66, H 141

Wall (surface)
anthracite metallic (DB703)

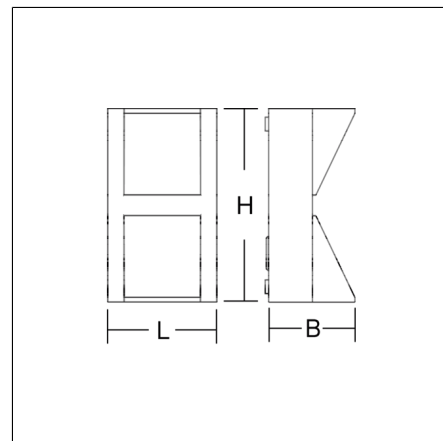

Wall luminaire. Housing: die-cast aluminium, powder-coated. Clear glass cover. Light emission: on two sides. Driver integrated.

Product specifications

Length L	80 mm
Width B	66 mm
Height H	141 mm
Weight	470 g
Light source	LED
Colour temperature	3000 K
Rated luminous flux	220 lm
System power	6 W
System efficiency	37 lm/W
Glare evaluation RUG (4H 8H)	18,8
Beam angle	down 33°/44°/20°/44° up 34°/43°/20°/43°
Rated life	25000 h (L70/B50)
Colour rendering index (CRI)	82
Colour tolerance (McAdam)	2 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	200
Luminaires on B16A fuse	320
Inrush current / Inrush current duration	40 A / 15 µs
CIE Flux Code / CEN Flux Code	81 98 99 50 100
Type of protection	IP 54
Protection class	I
Filament test	960 °C
Impact resistance	IK06
Ambient temperature	-20 °C bis + 40 °C
Conformity mark	CE, EAC