


HB 720

921723.003 | Highbay luminaires



Highbay luminaires
4068754023801
D 320, H 125

Suspension cable/chain
traffic black (RAL 9017)

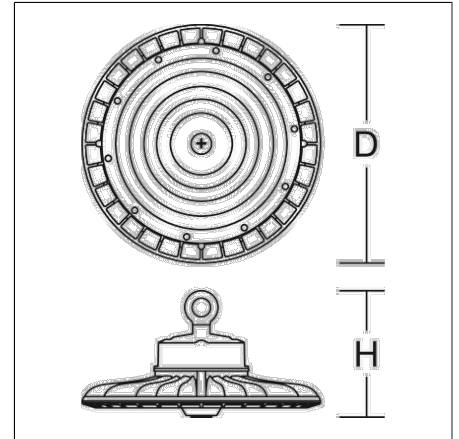

Flat round highbay luminaire for chain or cable suspension. Housing: die-cast aluminium, powder-coated. Diffuser: shockproof plastic (polycarbonate). MultiLumen: 3 steps adjustable luminous flux. Factory setting is the highest luminous flux. Easy to install thanks to 1-point suspension. Suitable for chain or steel cable suspension (to be provided on site). With 3-pin connection terminal (300 mm). Luminaire with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Product specifications

Diameter D	320 mm
Height H	125 mm
Weight	2.5 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	15000 lm 20000 lm 25000 lm
System power	92 W 128 W 166 W
System efficiency	151 lm/W 156 lm/W 163 lm/W
Glare evaluation RUG (4H 8H)	25,3 26,3 27,1
Beam angle	87°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	5 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	3
Luminaires on B16A fuse	4
Luminaires on C10A fuse	6
Luminaires on C16A fuse	10
Inrush current / Inrush current duration	60 A / 300 µs
CIE Flux Code / CEN Flux Code	70 94 99 100 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature	-20 °C bis + 45 °C
Safety marks	D-mark
Conformity mark	CE, EAC

HB 720

921723.003 | Highbay luminaires



Accessories



983232.000
Refractor: plastic



983228.0031
Ceiling and wall mounting bracket