

VOLANT 33

CHANDELIER

Volant is a modern chandelier that’s almost akin to a kinetic sculpture. A static lamp with a mystifying ability to appear in motion. Solid brass bars are home to textured, tubular formed glass elements, angled to give the impression of floating objects revolving around each other. The result is an elegant equilibrium that’s at once enthralling yet soothing.


AVAILABLE FINISHES




TECHNICAL

MATERIAL	TREATED BRASS, GLASS		LED LIFESPAN	50,000 HRS	
FINISH	ALL BRASS FRAMES ARE BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING.		IP RATING	IP20 - FOR INDOOR USE ONLY	
			CERTIFICATION	AU/NZ EU	AS/NZS 60598.1, 60598.2.1 EN 60598.1, 60598.2.1
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) VC333S - 13.2W, 1710-2100 LM, 2700K VC333L - 13.2W, 1710-2100 LM, 2700K WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.		US/CAN	ETL/UL 1598, CSA C22.2#250.0	
			CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE	
DIMMING OPTIONS	220-240V REGION PHASE - DIMMING RANGE 5 - 100% DALI - DIMMING RANGE 1 - 100%		SKU CODES	EG. VC333S.G-FLU.BR-BRZ VOLANT 333S CHANDELIER IN FLUTED CLEAR GLASS WITH A BRONZED BRASS FRAME	
				VC333S.G-XXX.BR-XXX VC333L.G-XXX.BR-XXX	VOLANT 333S CHANDELIER VOLANT 333L CHANDELIER
	110-120V REGION PHASE - DIMMING RANGE 3 - 100% DALI - DIMMING RANGE 0.1 - 100%		FINISHES		
			GLASS	FROSTED BLACK (G-FBL) FLUTED (G-FLU) FROSTED FLUTED (G-FFL)	
	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.		FRAME	BRUSHED BRASS (BR-NAT) BLACKENED BRASS (BR-BLK) BRONZED BRASS (BR-BRZ)	
DRIVER SIZE 220 -240V	FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.		WEIGHT	VC333S VC333L	21KG / 46LB 22KG / 48LB
			PACKAGING WEIGHT	VC333S VC333L	1 X 16KG / 35LB, 1 X 9KG / 20LB 1 X 3KG / 6.6LB 1 X 16.5KG / 36.5LB, 1 X 9.5KG / 21LB 1 X 3KG / 6.6LB
	110-120V		PACKAGING SIZE	VC333S	2 X L 1920 W 370 H 190 / L 75.6" W 14.6" H 8" 1 X L 500 W 500 H 250 / L 19.7" W 19.7" H 10"
				VC333L	2 X L 1920 W 370 H 190 / L 75.6" W 14.6" H 8" 1 X L 500 W 500 H 250 / L 19.7" W 19.7" H 10"
	DALI ALL VC33 - L75 X W35 X H26.5 / L3" X W1.4" X H1"				

DIMENSIONS

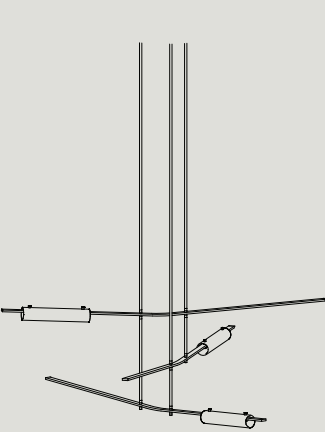

VC333S
L 1790 W 1570 H 600
L 70.5" W 61.8" H 23.6"
MIN DROP HEIGHT - H 790 / 31.1"

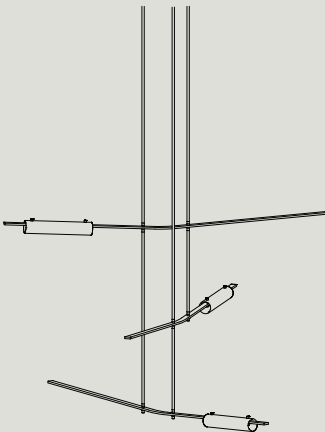

VC333L
L 1790 W 1570 H 1100
L 70.5" W 61.8" H 43.3"
MIN DROP HEIGHT - H 1290 / 50.8"

*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION.
*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED THE CIRCULAR CANOPY WILL BE SUPPLIED.

CIRCULAR (VC333)



CIRCULAR
FIXED CANOPY
CAN.VC.CIR.X-XXX

Ø480 X 37MM / 18.9" X 1.5"

DRIVER HOUSED IN CANOPY



CIRCULAR
FIXED SWIVEL CANOPY
CAN.VC.CIR.SW.X-XXX

VARIES PER ORDER

DRIVER HOUSED IN CANOPY

INDIVIDUAL CANOPY



SLIM
Ø14MM FIXED CANOPY
CAN.SL.F14.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



SLIM
Ø14MM FIXED SWIVEL CANOPY
CAN.SL.F14.SW.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED CANOPY
CAN.PK.F14.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED SWIVEL CANOPY
CAN.PK.F14.SW.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING

TECHNICAL

MATERIAL	TREATED BRASS / POWDER COATED STEEL
	<div><div> BRUSHED BRASS</div><div> BLACKENED BRASS</div><div> BRONZED BRASS</div><div> WHITE POWDERCOATED</div></div>
CANOPY FINISH	BRUSHED BRASS (BR-NAT) BLACKENED BRASS (BR-BLK) BRONZED BRASS (BR-BRZ) POWDERCOATED WHITE (C-WHT) (CIRCULAR CANOPIES ONLY)
SKU CODES	EG. CAN.VC.CIR.SW.BR-NAT = CIRCULAR FIXED SWIVEL CANOPY IN BRUSHED BRASS FINISH