


## TOCCATA

Housing: Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated acrylic cover.



Design: MARKUS BISCHOF

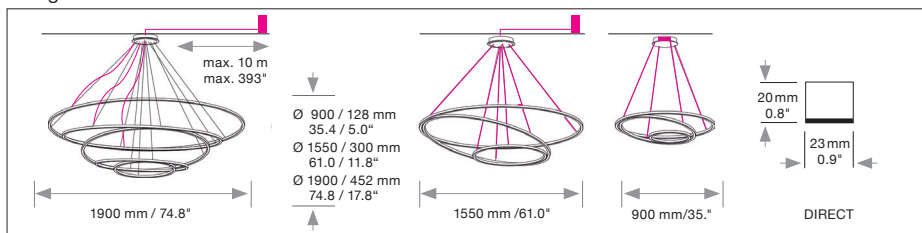



Size: Ø mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>Sizes</b>											
Ø 900 mm	35.4"	85	4.056	8.0 / 17.6	<b>777.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1550 mm	61.0"	147	7.010	11.0 / 24.2	<b>771.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1900 mm	74.8"	256	12.177	14.0 / 30.8	<b>773.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>LED</b> 24V CRI > 90 *CRI > 80		<b>Warm-white</b>	<b>3000 K</b>	<b>(Standard)</b>	x x x .	<b>63.</b>	x x .	x x .	x x .	x x x .	x
		<b>Neutral-white</b>	<b>4000 K</b>	<b>(Optional)</b>	x x x .	<b>69.</b>	x x .	x x .	x x .	x x x .	x
		<b>Extra warm-white</b>	<b>2700 K</b>	<b>(Optional)</b>	x x x .	<b>61.</b>	x x .	x x .	x x .	x x x .	x
		<b>Extra warm-white</b>	<b>2200 K*</b>	<b>(Optional)</b>	x x x .	<b>22.</b>	x x .	x x .	x x .	x x x .	x
<b>Dimming</b>		<b>Without Dimmer</b>		<b>(Standard)</b>	x x x .	x x .	<b>01.</b>	<b>00.</b>	x x .	x x x .	x
		<b>DMX</b>		<b>(Optional)</b>	x x x .	x x .	<b>31.</b>	<b>00.</b>	x x .	x x x .	x
		<b>Dimmable 1 - 10 V</b>		<b>(Optional)</b>	x x x .	x x .	<b>41.</b>	<b>00.</b>	x x .	x x x .	x
		<b>Dimmable 0 - 10 V</b>		<b>(Optional)</b>	x x x .	x x .	<b>51.</b>	<b>00.</b>	x x .	x x x .	x
		<b>Dimmable DALI</b>		<b>(Optional)</b>	x x x .	x x .	<b>61.</b>	<b>00.</b>	x x .	x x x .	x
		<b>Dimmable CASAMBI</b>		<b>(Optional)</b>	x x x .	x x .	<b>81.</b>	<b>00.</b>	x x .	x x x .	x
		Bluetooth 4.0 remote control through app.									
		<b>ENOCEAN wireless push button</b>		<b>(Optional)</b>	x x x .	x x .	<b>91.</b>	<b>00.</b>	x x .	x x x .	x
<b>Finishes</b>											
(Standard)	<b>11</b> white	(Optional)	<b>22</b> aluminium polished	<b>27</b> brush-finished aluminium	<b>30</b> anthracite	<b>32</b> crocodile black					
			<b>35</b> gold	<b>36</b> brass	<b>37</b> bronze fine textured	<b>38</b> copper					
						<b>10</b> black fine textured					
						<b>XX</b> Custom finish	x x x .	x x .	x x .	x x .	x
<b>Power Supply Cable</b> (Standard)											
	<b>000</b> without Mounting Version F	<b>Z 70</b> Silver					x x x .	x x .	x x .	x x .	x



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.


## TOCCATA




Housing: Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated acrylic cover.




Design: MARKUS BISCHOF

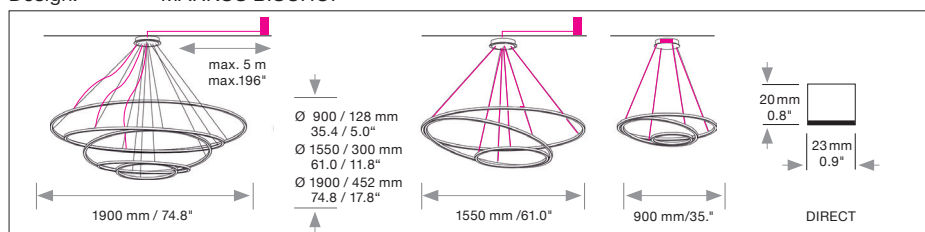


## Mounting Version




4/6/14-point suspension with external power supply unit in suspended ceiling




Ø 1900 mm / 74.8." 14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling



Ø 1550 mm / 61.0" 6 current-carrying steel cables with external power supply unit in suspended ceiling



Ø 900 mm / 35.4" 4 current-carrying steel cables with power supply unit in canopy



Ø 900 mm / 35.4" 4 suspensions through canopy with external power supply unit in canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

I / J = Distance of external power supply unit to light fixture max. 10m / 394".

F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with steel cable length 5 m / 197" and power supply cable, length 2 x 5 m / 2 x 196" (1550, 1900)

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	Ø 900	A
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	Ø 1550	I, J, A
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	Ø 1900	I, J, A

Dimensions of canopy			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 290	Ø 290 / 260 mm / 11.4 x 10,2"	Ø 900	F, E
Canopy finish: white (11)			
DB 230S	Ø 230 / 210mm / 9.0 x 8.3"	Ø 1550 / 1900	I, J
Base finish white (11), Cover white ( 11)			
If finish (22), Cover aluminium polished ( 22)			
contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**




CASAMBI wall-switch

white  
black

207. 00. 00. 00. 11  
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Ceiling fixation for mounting version A (3x)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

IP 20 Protective rating



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.