


Lanova 230

SX 975 31-9

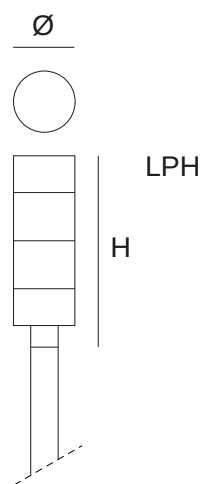

pole top luminaire

asymmetric flood

LED, 3300 lm, 4000 K, CRI > 80, electronic converter, Total power: 40 W

for spigot Ø 76mm, luminaire housing made of die-cast aluminium, powder-coated, diffuser shape made of PMMA, partly satinised,

Optical system: reflector optics
incl. 7m feed cable,

CE, IP65, Protection Class II

colour: Selux Graphite or special finish

Height H: 720 mm

Diameter Ø: 230 mm

Weight: 11 kg

Windpressure: 0,175 m²

Make: Selux, Type: SX 975 31-9



Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 4.2025

Selux GmbH, Volkmarstr. 18, 12099 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

Lanova 230

SX 975 31-9

Technics

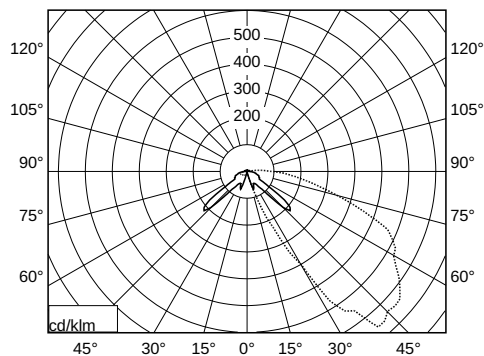

Photometric data: 7629

Upward light ratio (ULR): 5.4 %

Lamp

LED 3300lm, 40W, 4000 K, CRI > 80

Optic

reflector optics · asymmetric flood

Electrics

electronic converter · Total power: 40W ·

7m feed cable

control options:

dynamic · DALI · fix value · CLT · HNS ·

individual power reduction in 300 lumen

steps ex work ·

Luminous flux characteristics / Operating time of LED

	20000	40000	60000	80000
Operating time LED				
Lumen maintenance	96%	93%	90%	87%
LLMF*	0.96	0.93	0.9	0.87

* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 4.2025

Selux GmbH, Volkmarstr. 18, 12099 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com