



Job Name:

Contact:

Ordering Code:

Fixture Type:

Silva

BRUCK.
LEDRAbrands



711 orange



712 white



713 smoky



714 turquoise



715 red

Description

Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design. Most of Bruck's mini-pendant glass allows for easy screw-on / screw-off for a simple installation.

Standard cable length is 59". Overall cable length is measured and begins from uni-plug or top of mono-point. For the track adapters, overall cable length begins at the shoulder of the ECO/GEO adapter and the track center of the Zonyx adapter. Cable length measurement ends at the top of glass or to the mounting arms.

Ordering Codes

Follow the steps to specify your fixture,

example: **223 - 713 - ch - MP**

1 Light Source	2 Shade Color	3 Finish	4 Mounting Option
223 400 lm LED	711 orange 712 white 713 smoky 714 turquoise 715 red	bz bronze ch chrome mc matte chrome	MP 4" Canopy UNI12 Uni-Plug 12 MULTI LED multi-point




Job Name:

Contact:

Ordering Code:

Fixture Type:

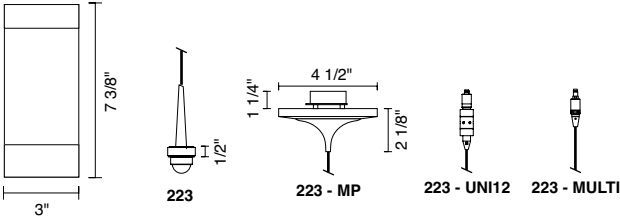

Light Source **223 - LED**

Performance		
LED	• Cree XTE	
LUMEN	• 400 lm	
CCT	• 2800k	
SDCM	• 3 MacAdam Elipse, +/-75 Kelvin	
CRI	• 90 min.	
LIFE	• based on IESNA-LM80-2008: 90% of initial lumens after 60,500 hrs	
Technical Specs		
Socket Listing	• integrated LED module • ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0	
Mounting		
Uni-Plug UNI12	• 12V AC input • 9W, 11.3VA • Dimmable	
4" Canopy	• 120-277 50/60Hz input • 8W, 8VA • Dimmable: • ELV (Reverse Phase) • Mount to 3 1/2" - 4" round J-Box • Short circuit protection • Thermal protection	
MULTI	• 700mA constant current input • 6.3W • Mounts to low voltage LED multi-point canopy • Dimmable, refer to low voltage LED canopy spec sheet	
Warranty		
	• 5 year limited fixture warranty	



Made in the USA - meets the requirements of the Buy American provision within the ARRA